





### PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Inbuilt safety features - freeze cycle back up timer, defrost back up, low voltage & high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination protection.
- Durable stainless steel exterior.
- Easily accessible and cleanable air filters reduce costly callouts.
- Exceptionally hard crystal clear cubes that melt slowly.
- Auto rinse and flush cycle.
- 3 year parts and labour warranty on entire unit, 5 year (parts only) on compressor & air cooled condenser coil.

### CUBE SIZE:



### TECHNICAL DRAWING

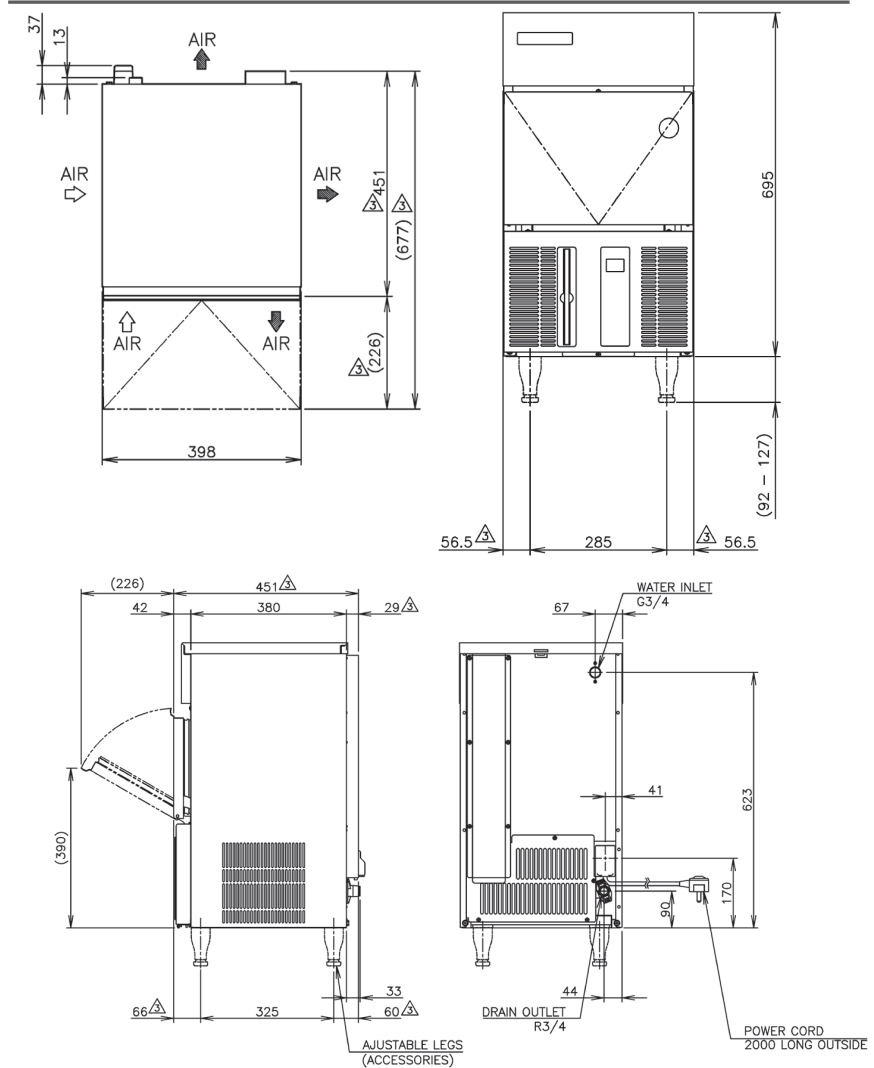

### PRODUCT SPECIFICATION

Production Capacity per 24hours	Approx. 22kg @10°C Air temp; 10°C Water Approx. 18kg @21°C Air temp; 15°C Water Approx. 15kg @32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 11.5kg (Bin Control Setting Approx. 6kg)
Freeze Cycle Time	Approx. 19 Min
Ice Production Per cycle	Approx. 0.27kg/21pcs
Dimensions	398mm (W) x 451mm (D) x 785mm (H) (Units include adjustable legs 90-125mm)
Cooling	Air
Weight Net/Gross (kg)	34 / 39
AC Supply Voltage	1 PHASE 220-240V 50Hz /10AMP Plug
Amperage	Running: 1.7A Rated: 1.7A Starting: 10A
Refrigerant Charge	R134a / 130g
Operating Conditions	Ambient Temp.: 1-40°C Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: Rated Voltage ±6%



Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright © 2020 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: May 2020