





PRODUCT FEATURES

- Easy maintenance, low water and energy consumption.
- Each ice ball individually made by a jet spray.
- Automatically drains and refills after each new batch, for fresh, hygienic ice.
- Easily dismantled for cleaning.
- Closed water circuit offers the ultimate contamination protection.
- Hoshizaki ice makers are micro computer controlled, controlling the ice making process to perform at its best under varying circumstances, without having to make physical adjustments.
- A stainless steel exterior provides a hygienic and high quality finish.
- Foam injected polyurethane for insulation (JFC free), helps preserve the quality and consistency of the ice produced, reducing the number of production cycles.
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs.

ICE TYPE:BALL

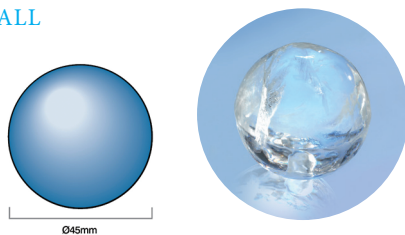

TECHNICAL DRAWING

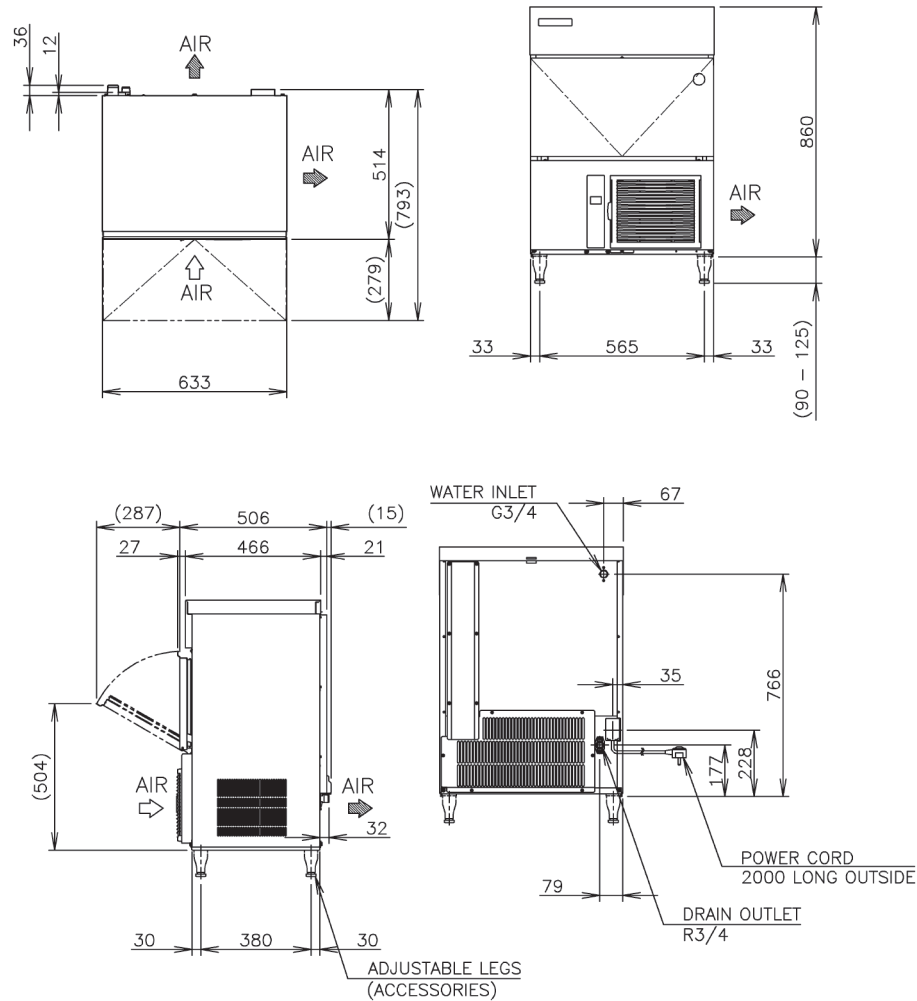

PRODUCT SPECIFICATION

Production Capacity per 24hours	Approx. 26kg @10°C Air temp; 10°C Water Approx. 24kg @21°C Air temp; 15°C Water Approx. 20kg @32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 17kg (Bin Control Setting Approx. 9kg)
Freeze Cycle Time	Approx. 33 Min
Ice Production Per cycle	Approx. 0.67kg/15pcs
Dimensions	633mm (W) x 506mm (D) x 950mm (H) (Units include adjustable legs 90-125mm)
Cooling	Air
Weight Net/Gross (kg)	53 / 66
AC Supply Voltage	1 PHASE 220-240V 50Hz /10AMP Plug
Amperage	Running: 2.9A Rated: 2.9A Starting: 17A
Refrigerant Charge	R134a / 200g
Operating Conditions	Ambient Temp.: 1-40°C Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: Rated Voltage ±6%



Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright © 2020 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: Sept 2020