



# specifications

## RF7.UBR.2.D6

### ReFlex Series, 6 Drawer, Underbench Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

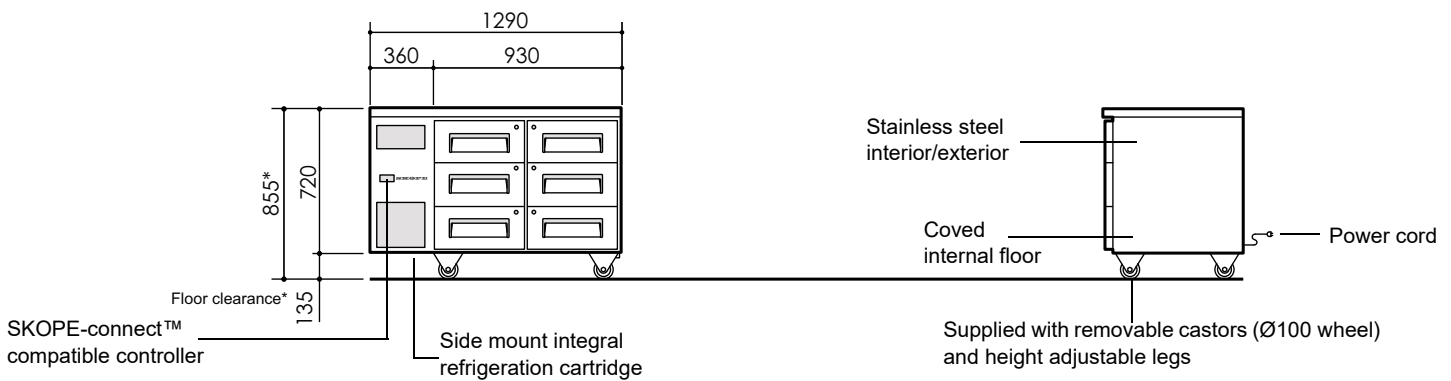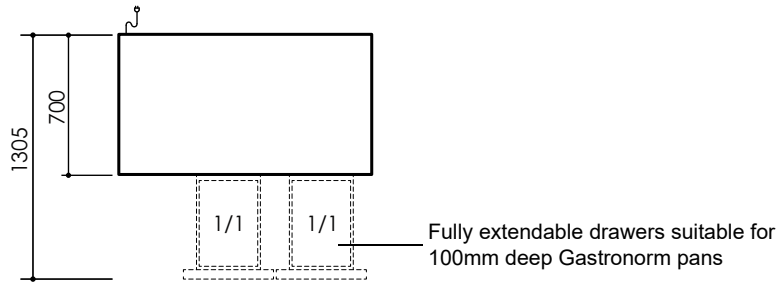

<b>CABINET</b>	
Drawers	6 × fully extendable, refrigerated, stainless steel drawers with individual key locks. 2 × banks of full drawers including stainless steel sheet base and sides. Fits GN1/1, 100mm deep pan as an insert (supplied separately). The pan top lip maximum height should be no more than 5mm.
Worktop	Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior
<b>PERFORMANCE</b>	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)
GEMS class	4M1
GEMS energy consumption	2.37 kWh/24h
GEMS annual running cost	\$260 p.a. (@ \$0.30/kWh)
<b>ELECTRICAL</b>	
Electrical safety climate class	5
Interior lighting	n.a.
Power cord	2.6m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.5 Amps)
<b>REFRIGERATION</b>	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side-mounted, integral, removable refrigeration cartridge (part number ULKCNI-0040)
Refrigerant	R290 / 80g (natural refrigerant)
Nominal capacity	450 Watts
Heat rejection (Avg./peak)	100 Watts/105 Watts
Drainage	No plumbing required

<b>DIMENSIONS</b>		
	External	Internal
Height	855mm*	570mm
Width	1290mm	820mm
Depth	700mm	530mm
Floor area	0.9m <sup>2</sup>	
Weight	142kg	
Gross volume	248L	
Net volume	90L	

\* With supplied castors fitted. See height variation below

<b>Height variation</b>	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

<b>Dimensional tolerances</b>		
Before installing this cabinet allow the following dimensional tolerances:		
<b>Linear dimensions</b>	<b>Overall cabinet dimensions</b>	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	<b>Length of multiple cabinets</b>	
	<b>At each joint</b>	<b>At each end wall</b>
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

<b>Ventilation requirements</b>	
Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020

PSS0671 Rev. 2.3 Nov 2021

#### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673  
Email: skope@skope.com, Website: www.skope.com

