

## Two Glass Swing Door CounterLine

**Range:** BackBar  
**SKOPE ID:** CL002  
**Dimensions:** 1580mm (W) × 680mm (D) × 830mm (H)\*  
**Capacity:** 345L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

\* Height with castors is adjustable from 820 to 835.



A glass door under-counter bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The ‘frameless’ glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in Remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



GEMS



SKOPE-connect

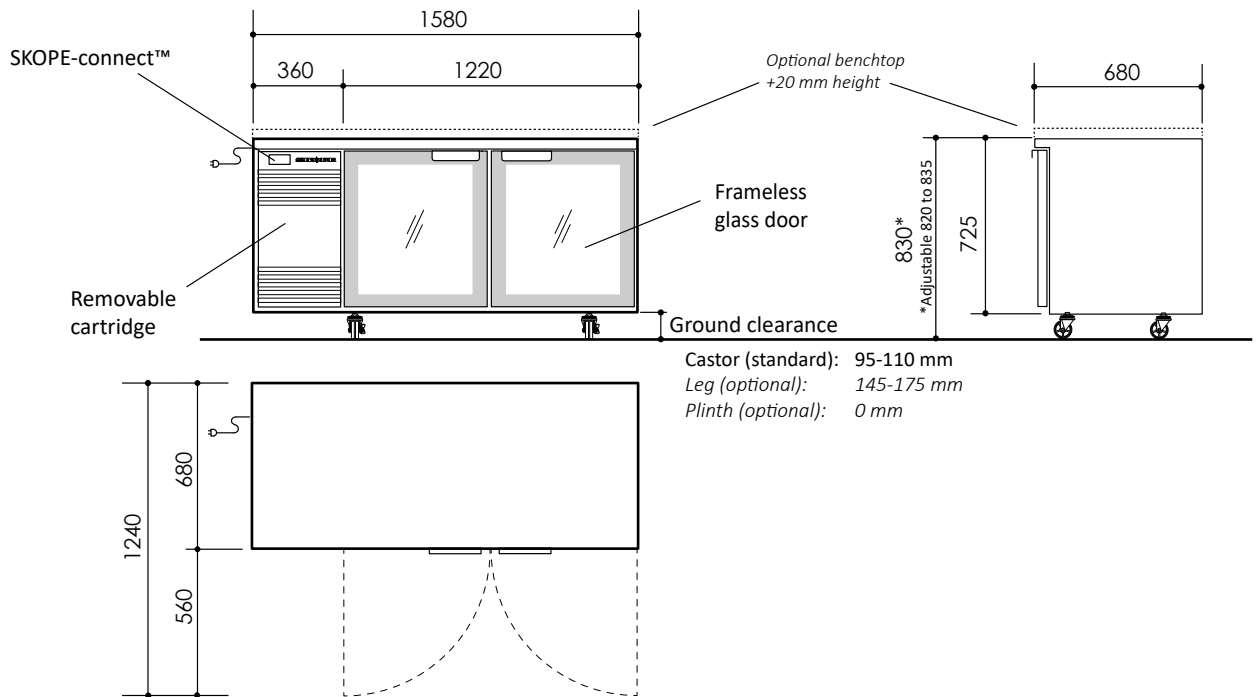

## Cabinet

<b>Type</b>	CounterLine
<b>Finish</b>	Powdercoat galvanised steel or stainless steel
<b>Insulation</b>	Type PU foam
	Thickness (mm) 50
	Blowing Agent Cyclo.iso Pentane (C5H10/C5H12)
<b>Doors</b>	Type Glass Swing door (double-glazed, low-e, argon-filled)
	Opening Size Height (mm) 538 Width (mm) 511
<b>Shelving</b>	Four adjustable height, plastic-coated wire shelves 4 × outer shelf (547W × 530L)
<b>Lighting*</b>	1 × 16 W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling

## Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	1580	1120	TBC
<b>Depth (mm)</b>	680	565	TBC
<b>Height (mm)</b>	830 (std. castors)	545	TBC
	725 (plinth mount)		
<b>Weight (kg)</b>	168	TBC	
<b>Capacity (L)</b>	345		
<b>Footprint (m<sup>2</sup>)</b>	1.07		

## Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

## Product Loading

Facing	330ml can	600ml bottle
<b>Loading</b>	32	28
	256	196

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

## Performance

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 0 to 15)	
<b>Rated Ambient Temperature</b>	32°C/65% relative humidity	
<b>Maximum Ambient Temperature (°C)</b>	40	
<b>Sound Level (dB(A))</b>	Standard	Less than 66
	Hush Mode*	Less than 62

## Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	9
<b>Product Temperature Class</b>	M1 (.1 to 5°C)
<b>Total Energy Consumption</b>	1.87 kWh/24h
<b>Annual Running Costs</b>	\$205 (@ \$0.30/kWh)

## Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	1.9 m power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	2.6

## Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	24		
<b>Refrigerant/Charge</b>	R290/81g		
<b>Nominal Capacity (W)</b>	650		
<b>Heat Rejection (W)</b>	Average	80	Peak 100
<b>Remote Duty</b>	n.a.		
<b>Defrost Type</b>	Off-cycle		
<b>Drainage</b>	No plumbing required		



CL.2.GSW  
on the SKOPE website