

SPH615HAU

EASYLINE PASSTHROUGH DISHWASHER WITH **SHR+ - STEAM HEAT RECOVERY**

THREE PHASE (6.7 KW SINGLE PHASE OPTIONAL) - 600x500 mm basket

FULLY INSULATED CONSTRUCTION



GUARANTEED WASH PERFORMANCE

In commercial dishwashers, the rinse is the most important part of the wash cycle, as it is the only one performed with clean water. This is the reason why, at Smeg, we believe all commercial dishwashers must have **a rinse pump on board**, the only way to guarantee that optimal and constant pressure and temperature are maintained throughout the rinse cycle.

WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in our state of the art factory in Italy, where we monitor all phases of design, engineering and production.

PRODUCT FEATURES

- **Double skin, fully insulated hood and panels**
- Construction in AISI 304 stainless steel
- Small capacity tank (22lt), moulded and with rounded edges
- Hood opening height: 470mm
- **Capacity to wash 600x500mm baskets and 600x400 trays**
- 20% higher load capacity compared to standard pass-through dishwashers
- **SHR (Steam Heat Recovery) device**
- **HTR (High Temperature Rinse) system with atmospheric boiler and rinse pump**
- 2.7 litres water rinse cycle
- Drain pump
- Five stage dynamic filtration system to separate dirt particles from wash water and to control tank level
- **Water connection: Cold**
- Upper and lower wash and rinse arms in AISI 304 stainless steel
- Full size tank filter with removable basket, all in AISI 304 stainless steel
- Electronic control with 6 wash programs
- Shortest wash program 60 seconds
- Automatic "stand-by" to reduce energy consumption when not washing
- Automatic start on hood closure
- Soft start wash pump
- Automatic self-cleaning cycle and shut-off at the end of drain cycle
- Thermostop system to ensure correct rinse temperature
- Adjustable peristaltic pumps for detergent and rinse-aid injection
- Self-diagnostic system with error messages
- **Power connection: three phase (standard) or single phase (optional)**
- **24 months parts and labour warranty**

INCLUDED ACCESSORIES

- Dish basket: 1 x PB60D01 (600x500x115mm)
- Cutlery basket: 1 x PHOOS03
- Flat basket: 1 x PB60G01 (600x500x115mm)

SPH615HAU


EASYLINE PASSTHROUGH DISHWASHER WITH **SHR+ - STEAM HEAT RECOVERY**

THREE PHASE (6.7 KW SINGLE PHASE OPTIONAL) - 600x500 mm basket

FULLY INSULATED CONSTRUCTION

TECHNICAL SPECIFICATIONS

Dimensions (mm) (WxDxH)	634x753x1510/2102	Minimum supply pressure (bar)	1 Bar - 100kpa
Basket (mm)	600x500	Drain pump	Yes
Door clearance (mm)	470	Rinse aid pump	Peristaltic
Type of interface	Electronic - 4 Digit	Detergent pump	Peristaltic
Supplied water temperature (°C)	cold to 20° max	Special programmes	Drain Self-cleaning
Tank volume (litres)	22	Thermostop	Yes
Tank heating element (W)	2,200	Total power (W)	1 φ 6,700 - 3 φ 9,700
Filtering system	5 Stage	Electrical connection	Standard 400V 3N~/16A/9,7kW/50Hz
Boiler volume (litres)	10		Optional 230V~/30A/6,7kW/50Hz
Boiler heating element (W)	9,000		
Wash pump (W)	700		
Tank temperature (°C)	60°		
Rinse pump	Yes		
Rinse temperature (°C)	85°		
Adjustable temperatures	Yes		
Water consumption (litres/cycle)	3.2		
Net weight	134kg		

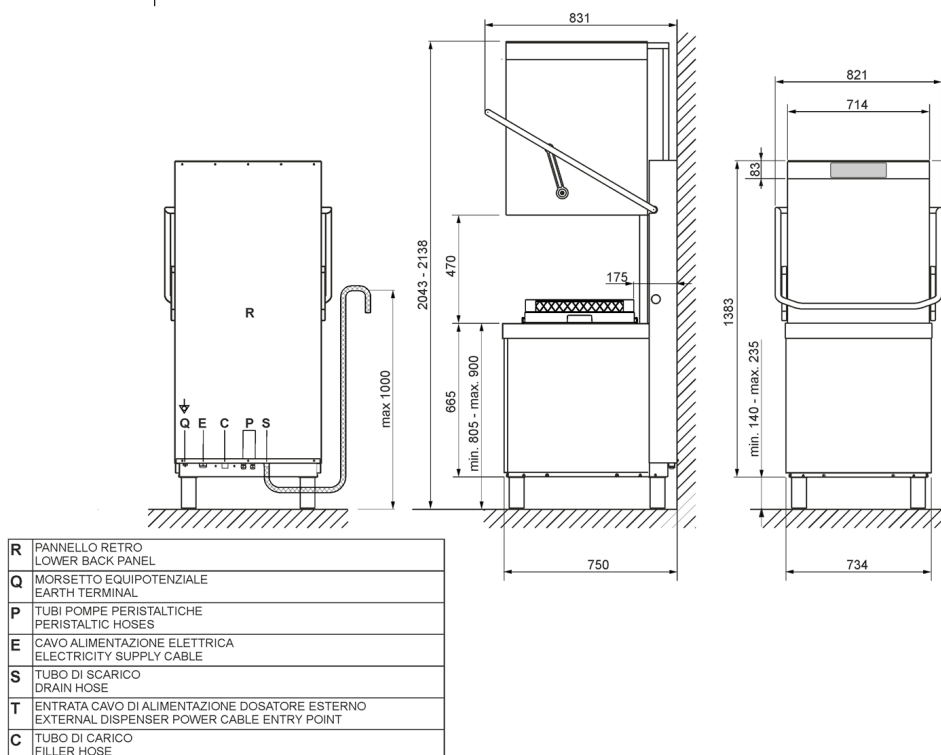

* Indicative wash times

*Cold water connection required and three-phase electrical connection whenever possible

