

# SWT262TAUS

## FRESH WATER SYSTEM DISHWASHER - THREE PHASE (15 AMP OPTIONAL)

Double basket configuration



### PROFESSIONAL STANDARD, DOMESTIC STYLE USE

With its special configuration of the **two baskets, similar to a domestic dishwasher**, Smeg SWT262TAUS combines the features and benefits of a **truly professional dishwasher**, with the simplicity of use for users who may not be familiar with the use of tank dishwashers and installations requiring a domestic kitchen "look".

### HIGHEST LEVEL OF HYGIENE IN THE FOODSERVICE INDUSTRY


With **final rinse up to 93 degrees for 10 minutes**, Smeg SWT262TAUS offers **disinfection cycles with A0 levels up to 12,000** and hygiene levels comparable to the ones required for medical standards.

### WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in **our state of the art factory in Italy**, where we monitor all phases of design, engineering and production.

## PRODUCT FEATURES

- **Easy to use, double basket configuration, similar to a domestic dishwasher, for a wider range of users and applications**
- **Professional dishwasher, 85°C rinse temperature**
- **Special disinfection cycles, 93°C rinse temperature**
- Total water exchange in every phase during cycle - both washing and rinsing
- Electronic control
- Double skin construction in AISI 304 stainless steel
- Moulded wash tank, rack guides and door
- Counterbalanced door with spring assisted hinges, full surround door gasket and no supporting rods
- Safety door locking mechanism, with end of cycle automatic opening
- Drain pump
- Rinse pump to guarantee constant and optimal rinse pressure, with electronic temperature control.
- Soft start wash pump
- Stainless steel filtration system
- **Steam condensing system**
- **Electrical connection: Three phase - 7.0kW (Standard) / Single phase, 15 Amp (optional). Turn to page 2 for more information.**
- **24 months parts and labour warranty**

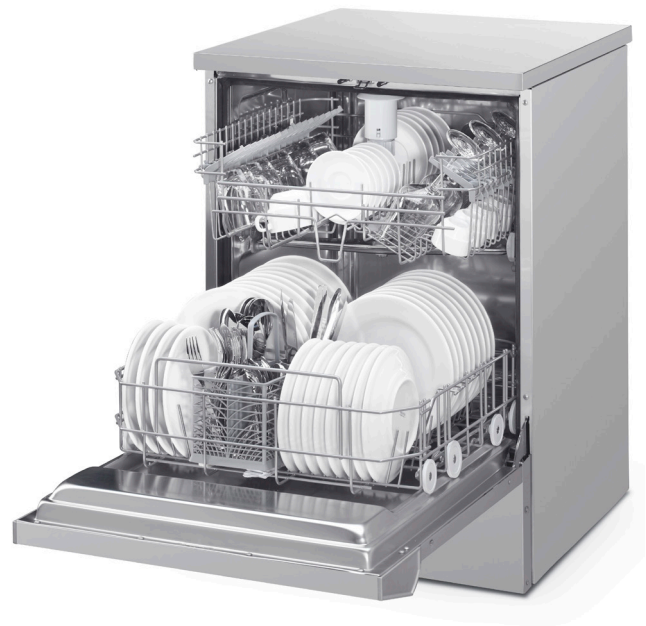

# SWT262TAUS

## FRESH WATER SYSTEM DISHWASHER - THREE PHASE (SINGLE PHASE OPTIONAL)

Double basket configuration

### TECHNICAL SPECIFICATIONS

**Dimensions (mm) (WxDxH)**

|                                 |                             |
|---------------------------------|-----------------------------|
| Dimensions (mm) (WxDxH)         | 600x600x850                 |
| Basket                          | Double basket configuration |
| Type of interface               | electronic                  |
| Door/hood structure             | double skinned insulated    |
| Supplied water temperature (°C) | From cold to 60°            |
| Tank heating element (W)        | 6,300                       |
| Rinse pump                      | Yes                         |
| Rinse temperature (°C)          | 85° or 93°                  |
| Net weight                      | 74kg                        |

|                       |   |
|-----------------------|---|
| Drain pump            | Yes   |
| Rinse aid dispenser   | Integrated in the door  |
| Detergent dispenser   | Integrated in the door  |
| Total power (W)       | 7.0 kW<br>(Three phase setting)   |
| Electrical connection | <b>Standard:</b> 400V 3N~/12A/7,0 kW/50Hz<br><br><b>Optional:</b><br>230V 3~/19A/7,0kW/50Hz<br>230V 1N~/16A/3,5kW/50Hz<br>230V 1N~/12A/2,8kW/50Hz |


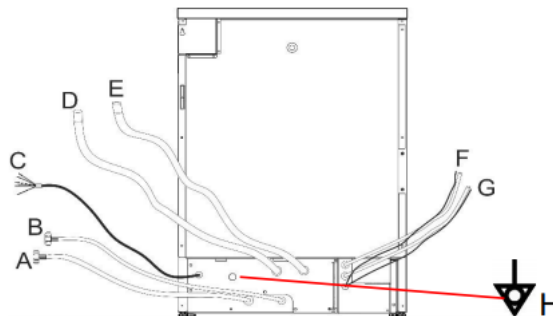


fig. 3 – Diagram, back panel connections and hookup.

CONNECTION WIRING DIAGRAM KEY

|                                 |                         |
|---------------------------------|-------------------------|
| A HOT WATER SUPPLY HOSE (RED)   | E DISHWASHER DRAIN HOSE |
| B COLD WATER SUPPLY HOSE (BLUE) | F PERISTALTIC PUMP P1   |
| C POWER SUPPLY CABLE            | G PERISTALTIC PUMP P2   |
| D STEAM CONDENSER DRAIN HOSE    | H SYSTEM EARTH          |

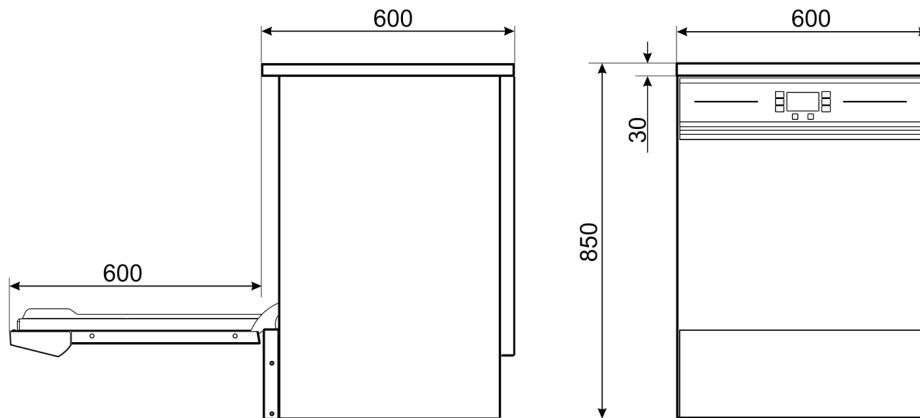

UNI EN ISO 9001 9130-Smeg  
UNI EN ISO 14001 9191-SME2  
OHSAS 18001 9192-SME3