

# ALFA420E1HDS

## HUMIDIFIED CONVECTION OVEN - THREE PHASE (SINGLE PHASE OPTIONAL)

4 Tray capacity, 600x400mm



### GUARANTEED COOKING PERFORMANCE

Smeg catering products draw on the experience of approximately 40 years in the Foodservice industry. The ovens are built with the highest quality materials, making them particularly tough and strong.

### FAN SYSTEM

The heat in the oven is distributed by the means of two fans with adjustable fan speeds, which are turning in opposite directions, with timed direction reversal. This alternating operation guarantees uniform cooking and enhances the browning of food products in all larger cavities.

### VERSATILITY

The complete Smeg Professional catalogue offers a range of ovens for all needs and environments, fulfilling any requirement in the most efficient and high-performing way.

### PRODUCT FEATURES

- Compact and functional design, robust stainless steel construction
- Full stainless steel oven cavity
- Electronic touch controls
- **Rack suitable both for 600x400 and GN1/1\* trays**
- **Excellent baking uniformity across all trays, due to two fans rotating in opposite directions and with timed rotation reversal.**
- Excellent internal visibility due to the large glass and powerful inner light
- Double glass door, with internal glass removable for cleaning
- **3 Levels plus manual humidification, through a plumbed water system connection**
- **Electrical connection: Three phase - 6.9kW (Standard) / Single phase, 6.9kW (optional). Turn to page 2 for more information.**
- Dimensions (mm) (WxDxH): 800x747x563
- **24 months parts and labour warranty**

### OPTIONAL ACCESSORIES

- TVL425 & TVL425D - Stainless steel stand
- 3743 - Flat aluminium tray
- 3805 - Wire racks
- 3810 - Undulated wire racks
- 3751 - Flat aluminium tray with holes

\* GN1/1 with minimum 20mm depth



# ALFA420E1HDS

## HUMIDIFIED CONVECTION OVEN - THREE PHASE (SINGLE PHASE OPTIONAL)

4 Tray capacity, 600x400mm & GN1/1 (optional)

### TECHNICAL SPECIFICATIONS

Dimensions (mm) (WxDxH)	798x747x563
Trays (mm)	600x400
Tray capacity	4
Distance between trays (mm)	77
Control type	Electronic Touch Control
Door/hood structure	Stainless steel
Temperature range (°C)	50 - 280°C
Timer	1 - 99min + infinite
Power rating & electrical connection	Standard: 400V 3N~/10A/6.9kW/50 Hz Optional: 230V~/30A/6.9kW/50 Hz
Net weight	63kg

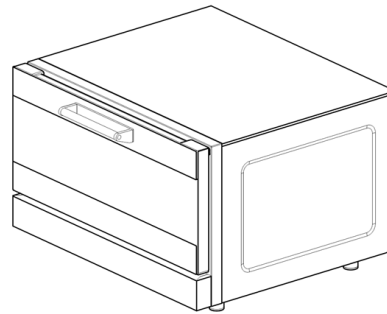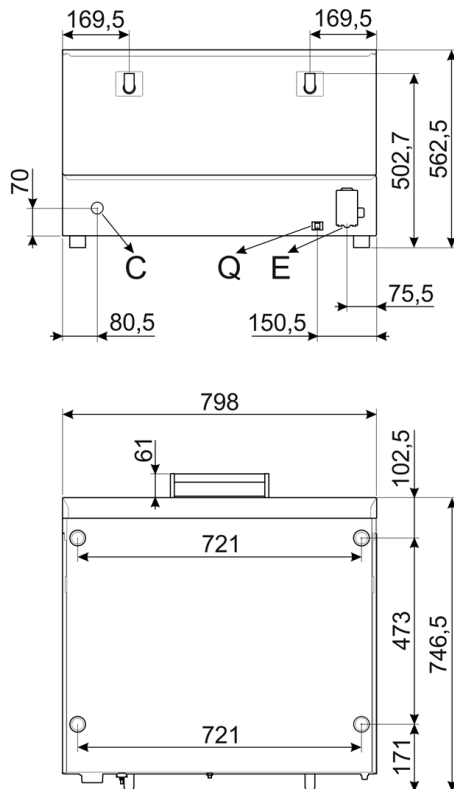

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO (solo su alcuni modelli) FILLER HOSE (on some models only)



UNI EN ISO 9001  
9130-Smeg

UNI EN ISO 14001  
9191-SME2

OHSAS 18001  
9192-SME3