

SPO4L2SDL

COMBI STEAM BAKING OVEN

4 trays - EN6040 (600x400 trays)



PRODUCT FEATURES

- Functional design, robust stainless steel construction
- Full stainless steel oven cavity
- Digital canvas 7" display that allows customisation of operating modes. Easy to use and allows any chef to achieve the best results.
- Multi-point core probe (4 temperature points)
- Capacity to do multi-level cooking for complex menus that require different foods to be cooked at the same time.
- Excellent internal visibility due to the large glass and powerful inner LED lights
- Triple glass door, with internal glass removable for cleaning
- USB port: located on the side door, conveniently positioned for instant updates and loading new recipes.
- **24 months parts and labour warranty**

NEW THERMOFUNNEL CAVITY

The careful design of the **new cavity**, with a **parabola-shaped** back, and new **deflector geometry** improves air distribution and ensures homogeneous heating of all types of food. This produces uniform cooking and excellent results with a reduction in cooking times and energy consumption.



WASHART SYSTEM



Distributes water and detergent uniformly inside the cavity, ensuring cleaning and drying in a very short time and with reduced energy and water consumption. Four automatic wash cycles are available and one rinse cycle.

SPO4L2SDL






COMBI STEAM BAKING OVEN

4 trays - EN6040 (600x400 trays)

TECHNICAL SPECIFICATIONS

Oven material	Stainless steel	Components cooling system	Yes
External dimensions (WxDxH)	790 x 875 x 645mm	Timer type	Electronic timer
Cavity material	Stainless steel	Temperature range	30 - 270°C
Number of shelves	4 with EN6040	End cooking signal	Yes
Tray frame support	Stainless steel AISI 304 Chromed wire Double format	Manual reset safety thermostat	Yes
Shelves distance	90mm	Removable deflector	Yes
Door opening	Lateral	Detergent type	Liquid
Handle type	New ergonomics	Lighting	1 LED
Openable glass	Yes	Light power	3.6 W
Fan type and number	1 counter rotating fan with time direction reversal	USB port	Yes
Pulse fan	2 counter rotating fan with time direction reversal	Water load pipe	Yes
Engine power	200W	Power cable length	170cm
Max standard speed motor rpm	2,000rpm	Back panel	Galvanized
Low speed rpm	1,425 rpm	IPX protection	End cooking with auto- matic shutdown
Water injection on the fan	Yes	Electrical connection	400V 3N~/17.5 A/ 8,0 kW/50Hz
Humidification levels	Automatic and progressive percentage	Net weight	91 kg
Open boiler	No		

TECHNICAL DRAWING

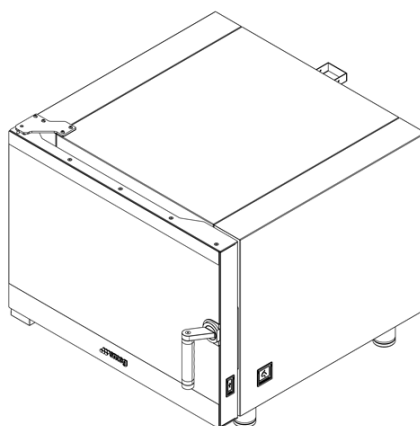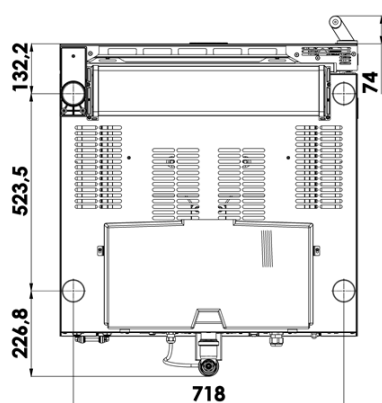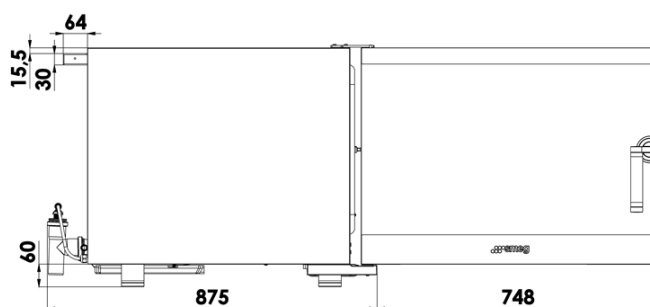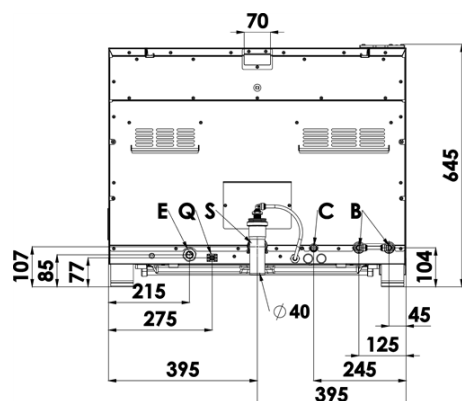

Q	EARTH TERMINAL
E	ELECTRICITY SUPPLY
S	WATER DRAIN TUBING
C	FILTER HOSE
B	BYPASS DESCALER