

TUMBLE DRYERS

DX
RANGE

DX 13

13KG

DX 24

24KG



FEATURES

- Controls:
 - Dual Digital Control or OPL Micro
 - Coin operated version: XQ-Control
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading
(Ø 57cm,DX13,16, Ø 68cm DX24)
- Galvanized drum
- Axial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Reversing drum
- Residual moisture control Sensodry+®
(only with Full OPL Micro):
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



EASY OPERATION




SERVICE FRIENDLY

senso.dry+


SafeTech™

TYPE		DX13	DX24
CAPACITY			
Capacity	kg	13	24
Drum volume	l	270	490
Drum diameter	mm	Ø 673	Ø 838
AIRFLOW			
Airflow	l/s	240	330
DRYING AVERAGE			
Gas heating	g/min	267	485
Electric heating	g/min	258	371
MOTOR			
Fan	kW	0,4	0,4
Drive	kW	0,2	0,4
GAS HEATING			
Energy	kW	21,4	32,8
Energy	kBTU/h	73	112
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz	
Gas connection	NPT	½"	½"
STEAM HEATING			
High pressure 6,9 bar	kW kBTU/h	24,47 83,5	- -
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz	
Steam connection	NPT	¾"	-
ELECTRICAL HEATING			
Energy	kW	21	27
Electrical connection		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz	
EXHAUST	Ø /mm	150	200
DIMENSIONS			
Size H×W×D	mm	1625×710×1155	1700×875×1350
Net weight (E)	kg	150	200
Net weight (G,S)	kg	145	195
TRANSPORT DATA			
Packed (foil) H×W×D	mm	1720×760×1240	1790×900×1450
Gross weight (foil, E)	kg	160	220
Gross weight (foil,G,S)	kg	155	215
Packed (crate) H×W×D	mm	2210×880×1320	2210×1020×1520
Gross weight (crate, E)	kg	220	300
Gross weight (crate,G,S)	kg	214	295

Side DX 13 24

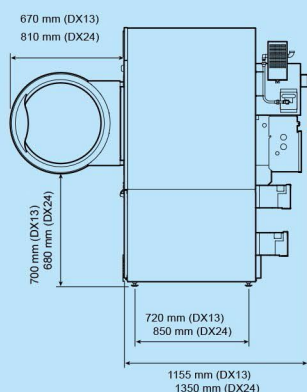

Back DX 13 24

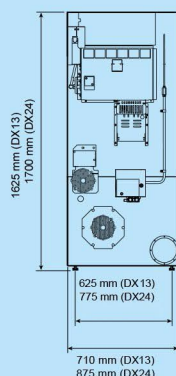

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

