



**FRIFRI TOUCH 422 ELECTRIC FREE-STANDING TWIN TANK FRYER -
2 BASKETS - W 400 MM - 2 X 7.5 KW - THREE PHASE**

MODEL: TL422L31G0



Touch

For those who run the busiest professional kitchens and refuse to compromise on quality, a Touch 422 is your newest kitchen assistant, helping you to deliver quality results every time.

A/A FILE NUMBER:

ITEM NUMBER:

PRODUCT FEATURES

- 24 one-touch icon-driven menu items, meaning regardless of the operator, at one touch deliver precisely the same results every time.
- Are there more fries than last time? Adaptive cooking automatically adjusts the cooking times to suit your batch size ensuring you never serve under-cooked food.
- The 4.3" QPad is intuitive, easy to use, and provides the wider functionality that only a touch screen can deliver.
- Easy-View Traffic Light Status — ColourCue. Great for busy and noisy kitchens, ColourCue shows you the status of your fryer at a glance: red - attention required such as unloading; amber – pre-heating; green - ready to fry.
- Understand your energy usage. Customise the eco settings by temperature to suit your operation. View where you can make savings with a detailed analysis of the fryer's energy usage over the last 8 hours, 24 hours, 7 days, and 28 days.
- Keeping your oil in peak condition! FriFri Oil Assistant and optional xFri© to easily monitor the condition of oil with the onscreen oil status. When prompted filter the oil even while it's still hot, mid-service if necessary, and resume frying in under five minutes. It is so quick and easy that there is no excuse not to!
- Raising food to the next level. Perfect for kitchens where you don't have time for constant supervision, the optional LiftFri© automatic basket lifting system lifts food at the end of the cycle to prevent overcooking.
- Pressed tank for strength and durability. Radiused corners for easy cleaning. Hinged elements with two tilt positions for draining and



FRIFRI TOUCH 422 ELECTRIC FREE-STANDING TWIN TANK FRYER - 2 BASKETS - W 400 MM - 2 X 7.5 KW - THREE PHASE

MODEL: TL422L31G0

WEIGHTS & DIMENSIONS

Width	397.5 mil
Depth	650 mil
Height	994 mil
Weight	79 kg

SHIPPING DETAILS

Ship Width	79 cm
Ship Depth	52 cm
Ship Height	113 cm
Ship Weight	81.84 kg
Number of Shipment Parcels	1
Ship Method	LTL Common Carrier
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Electrical Phase	3-Phase
Electrical Amps Per Conductor	L1=2 x 21.7; L2=2 x 21.7; L3=2 x 21.7	Electrical Plug Type	Hardwired
Electrical Total Amperage	130.2 A	Number of Electrical Plugs	Not Applicable
Electrical Volts	400V	Electrical Connection Type	Direct Hardwired
Electrical Total Wattage	30000 W	Number of Electrical Conductor Wires	1
Electrical Kilowatts	15 kW	Electrical Remarks	Three

ADDITIONAL SPECIFICATIONS

Auto Oil Top-Off	No	Number of Baskets	2
Basket Lift Type	Optional	Number of Vats (batteries)	2
Construction Remarks	Stainless Steel Grade 304	Total Oil Capacity (volume)	18 l
Control Type	Touchscreen	Oil Reclamation	No
Filter Media Type (if applicable)	2-Stage: Fine Tissue Filter and Stainless Steel Filter	Oil Temperature Control	Electronic
Food Production Rate	2 x 18kg fries - 7mm [frozen]	Pumped Oil Filtration	Optional
Fryer Type	Open Pot	Split Pot	Yes
Integrated Filtration	Yes	Temperature Maximum	190 °C
		Temperature Minimum	40 °C
		Vat 1 Oil Capacity (volume)	9 l
		Vat 2 Oil Capacity (volume)	9 l

Frifri reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
October 30, 2024








FRIFRI TOUCH 422 ELECTRIC FREE-STANDING TWIN TANK FRYER -
2 BASKETS - W 400 MM - 2 X 7.5 KW - THREE PHASE

MODEL: TL422L31G0

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING

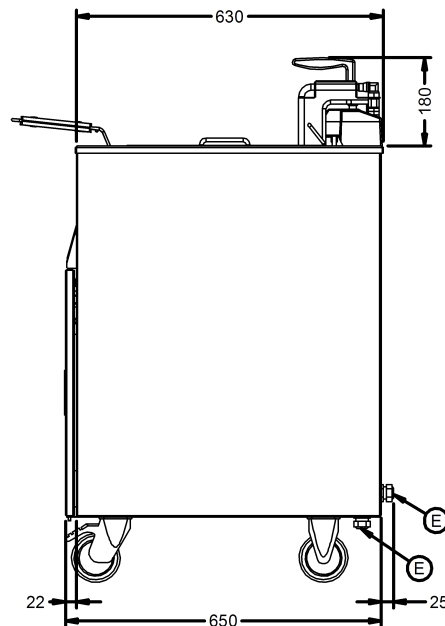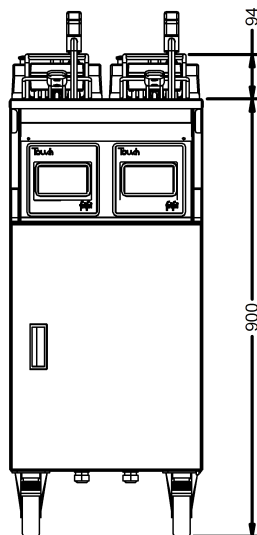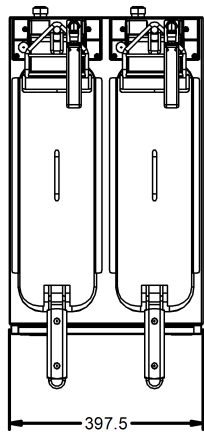

Frifri reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
October 30, 2024

