

The power of simple. Multiplied.

The Classeq Pass Through range.

WiFi enabled. 



CP500

Bringing simplicity to high-volume warewashing



The CP500 Pass Through range delivers more innovation, more performance, and more simplicity where it matters most. All the features you need. None of the hassle you don't.

Every Pass Through is WiFi enabled with access to the Classeq online portal, this enables you to remotely monitor every machine in one estate or multiple machines across a venue.



Simple choice.

Select an integral water softener and/or steam recovery unit as required. Choose your power level - single phase, 30 Amp or three phase, 16 or 22 Amp.

The 16 Amp, three phase model can be converted on site to 30 Amp, single phase. The 30 Amp single phase can also be converted to 16 Amp, three phase.



Simple set up and configuration.


New packaging makes one person installation simple*. Commissioned on install as a dishwasher or glasswasher.

Easily configured for straight through or corner locations.




Simple use.

Press on. Simply close the hood to start a wash. Watch the display for notifications and troubleshooting.



Simple cleaning.

New click-in, click-out wash arms, a double filtration system, deep clean programme and refresh cycle, all work together to make cleaning quick, easy, and hassle-free.



Simple connectivity.

Wi-Fi enabled with access to the Classeq online portal allowing you to monitor your machines remotely. Helping to maintain performance levels and plan servicing.

Plus, a Bluetooth® app for operators and service technicians providing on-site access to user guides, machine settings, performance data and diagnostics.



Simple servicing.


Quick access to key parts makes maintenance faster and more cost-effective.

Shared components with the undercounter range mean fewer spares and simpler servicing.

Simple. Robust.
CLASSEQ

* Installation must be carried out by a trained professional.
One person installation not applicable for models with steam recovery unit.

WiFi enabled.

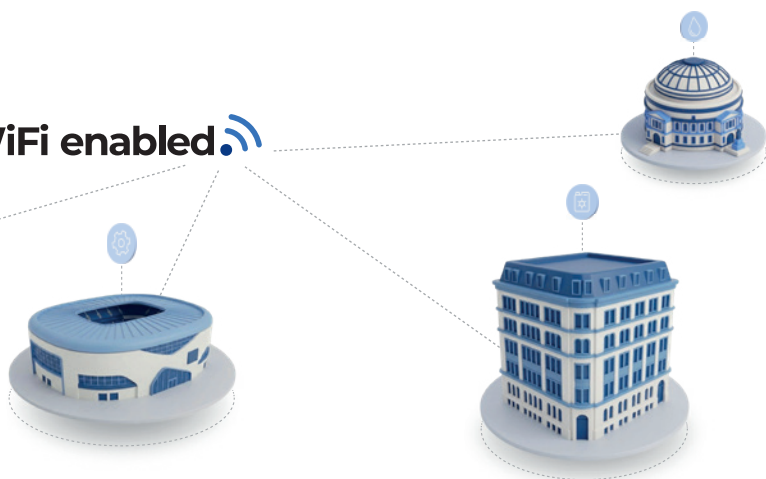

Steam Recovery Unit

Our new steam recovery option minimises the steam released into the kitchen, eliminating the need for extraction and creating a more comfortable workspace.

Better still, the captured heat is reused to preheat incoming water, improving efficiency with every cycle.

Simple to use, clean and maintain, robust enough to keep service flowing day after day.

Option for
an integral
water softener



Standard features across the range


-  Updated colour coded display.
-  Drain pump, rinse booster pump, detergent and rinse aid pumps all fitted as standard.
-  Energy saving standby mode.
-  Bluetooth® app.
-  Deep clean programme and refresh cycle.
-  Utensil wash programme with optional basket for Gastronorm 1/1 trays.
-  Guided descaling programme.
-  Optional audible alarm.
-  Optional integral water softener with new low salt audible alarm.
-  Hygiene and service reminders.
-  Wi-Fi enabled with free access to the Classeq online portal allowing you to monitor multiple machines remotely.
-  Rental Mode allowing Distributors to rent machines to operators based on number of wash cycles.
-  Optional chemical lance kit enabling the display of low detergent and low rinse aid warnings.
-  Range of tabling available, including support for bespoke requirements.
-  WRAS Compliant - Type AB air gap.
-  Three power options - single phase, 30 Amp or three phase, 16 or 22 Amp. On site flexibility to convert 16 Amp three phase model to 30 Amp, single phase and from 30 Amp single phase to 16 Amp, three phase.



Scan for more
information.

The details.

CP500

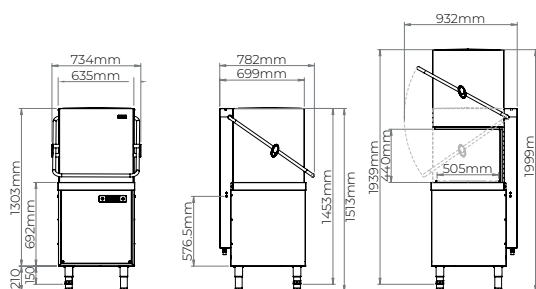

Capacities & Performance


	Dishwasher	Glasswasher
Rack/Basket Capacity	18 plates	25 glasses
Wash Programmes	1.5, 3, 5 & 7 min. cycles	1.5 & 2 min. cycles
Theoretical max racks per hour	40	40
Wash temperature	60°C	60°C
Rinse temperature	82°C (85°C on utensil wash programme)	70°C

Water supply connection	3/4"
Required water pressure	2.0 bar
Required water flow rate	4 litres/min
Drain size	Ø40mm
Drain height – Floor Level	0-700mm
Wash pump size	0.45kW
Wash tank Capacity	30 Litres
Wash tank heating	2kW
Rinse Boiler capacity	9 Litres (12 Litres for Intensive Models)
Rinse water Consumption at 2 bar	3.0 Ltrs
IP Rating	IP X4
Operating noise level	<70db

Components

WRAS Compliant - Type AB air gap	✓
Rinse booster pump	✓
Built in detergent dispenser	✓
Built in rinse aid dispenser	✓
Drain pump	✓
Temperature interlock	✓
Integral Water Softener	Optional

CP500 (with optional Steam Recovery Unit)

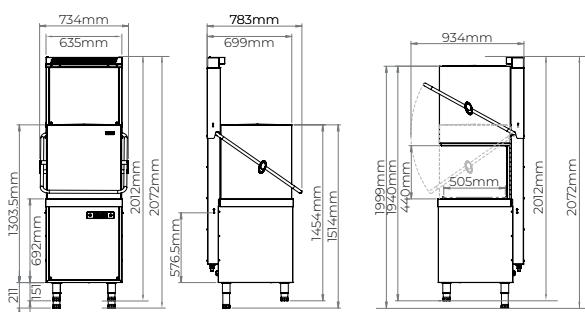

Weights

Net weight	130 Kg
Net weight – with Steam Recovery Unit	160 Kg
Weight (fully loaded)	170 Kg (173 Kg for Intensive Models)
Weight (fully loaded) – with Steam Recovery Unit	200 Kg (203 Kg for Intensive Models)

Electrical specification

Everyday Use	Single Phase	Three Phase
Amps required	30A	-
Standard operating voltage	220-240V/1N~/50Hz	-
Total connected load	6.5 kW	-
Intermediate Use		
Amps required	-	16A
Standard Operating Voltage	-	380-415V/3N~/50Hz
Total Connected Load	-	9.5 kW
Intensive Use		
Amps required	-	22A
Standard Operating Voltage	-	380-415V/3N~/50Hz
Total Connected Load	-	12.5 kW

Connectivity

Wi-Fi Enabled with free access to the Classeq Online Portal.
Bluetooth® App.

Simple. Robust.
CLASSEQ



Tel: +44 (0)1889 272338 | classeq.co.uk

Scan to download the Classeq App for performance insights and useful guides.