

The power of simple.

The C500 Utensil.

WiFi enabled. 



C500 Utensil.

Adding more to your undercounter warewasher.


The C500 Utensil option washes larger items, for longer, at higher temperatures perfect for gastronom trays and chopping boards.

Every C500 Utensil is WiFi enabled with access to the Classeq online portal, this enables you to remotely monitor every machine in one estate or multiple machines across a venue.




Simple choice.

One model level with all the features you need. Just choose the power and add an integral water softener if required.



Simple loading.

The larger wash tank and supplied utensil baskets make it easy to load up to five 1/1 gastronorm trays or five chopping boards. The basket is also suitable for an E3 box.

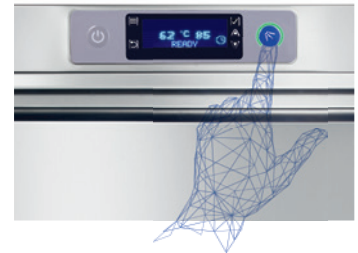

Simple use.

Press on. Select the utensil wash programme. Press wash. The utensil wash programme is longer and rinses at a higher temperature to maximise wash results.



Simple cleaning.

Simple click in, click out wash arms, double filtration system, and moulded basket rails all aid simple cleaning.



Simple connectivity.

Wi-Fi enabled with access to the Classeq online portal allowing you to monitor your machines remotely. Helping to maintain performance levels and plan servicing.

Plus, a Bluetooth® app for operators and service technicians providing on-site access to user guides, machine settings, performance data and diagnostics.



Simple servicing.

The repositioning of key parts make servicing and maintenance quicker. Reducing maintenance costs throughout the life of the machine.

Simple. Robust.
CLASSEQ



2 YEAR
WARRANTY

WiFi enabled.



Option for
an integral
water softener



Wash gastronorm trays, containers
and chopping boards.



The C500 Utensil – Key Features



The utensil basket is designed to hold up to five 1/1 gastronorm trays or chopping boards. The basket uprights are 72mm apart allowing trays up to 65mm deep to fit in standing.



Enlarged wash tank with a depth of 628mm and door opening size of 349mm.



Seven minute utensil wash programme with higher wash and rinse temperatures to maximise wash results.



Colour coded display.



Drain pump, rinse booster pump, detergent and rinse aid pumps all fitted as standard.



Energy saving standby mode.



Deep clean programme and refresh cycle.



Optional integral water softener with new low salt audible alarm.



Hygiene and service reminders.



Wi-Fi enabled with free access to the Classeq online portal allowing you to monitor multiple machines remotely.



Rental Mode allowing Distributors to rent machines to operators based on number of wash cycles.



Optional chemical lance kit enabling the display of low detergent and low rinse aid warnings.



Guided descaling programme.



Optional end of cycle audible alarm.



WRAS Compliant – Type AB air gap.



Two power options: 30A Single Phase and 13A Three Phase.




Supplied with one utensil basket, one plate basket and one small cutlery holder. Add more optional baskets to support efficient kitchen processes.



Scan for more
information.

The details.

C500 Utensil

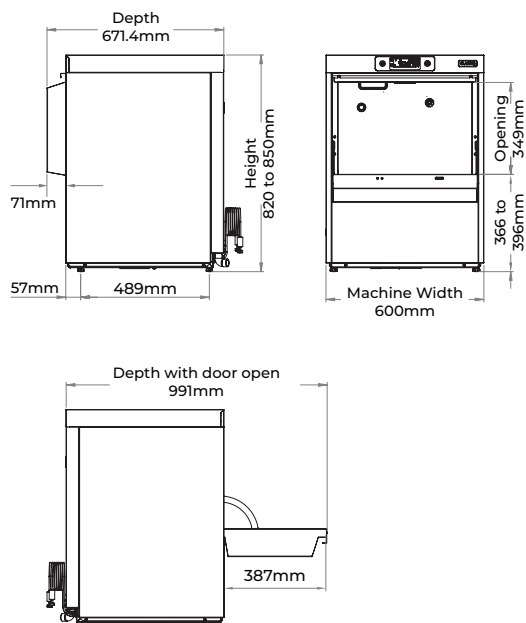

One utensil basket supplied.

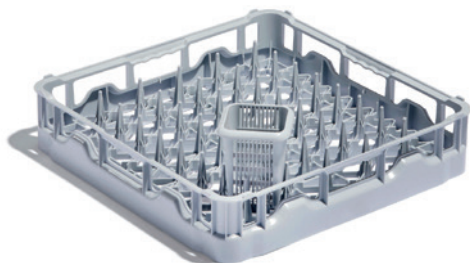


Plate basket and small cutlery holder also supplied, add further baskets to boost kitchen efficiency.

Capacities & Performance

1/1 gastronorm trays per rack	5
Chopping boards per rack	5
Plates per rack	18
Wash Programmes – Utensil	7 minute cycle
Wash Programmes – Dish	2, 3 & 5 minute cycles
Theoretical max. racks per hour - Utensil	8
Theoretical max. racks per hour - Dish	30
Wash tank capacity	15 litres
Rinse tank capacity	6.5 litres
Wash temperature – Utensil	62 °C
Wash temperature – Dish	60 °C
Rinse temperature – Utensil	85 °C
Rinse temperature – Dish	82 °C
Water consumption per cycle – Utensil	3.8 litres
Water consumption per cycle - Dish	2.75 litres

Hydraulics specification

Water supply connection	G3/4" (3/4"BSP)
Required water pressure min/max	1-10 bar
Incoming Water temperature min/max	4°C/55°C
Drain size	40mm diam.
Maximum drain height (from machine base)	600mm
Optional integrated water softener	Yes

Electrical specification

30 Amp – 1 Phase

Amps required	30A (1 Phase)
Standard Operating Voltage	220-240V/1N~/50Hz
Total Connected Load	6.5 kW

13 Amp – 3 Phase

Amps required	13A (3 Phase)
Standard Operating Voltage	380-415V/3N~/50Hz
Total Connected Load	6.5 kW

Connectivity

Wi-Fi Enabled with free access to the Classeq Online Portal.

Bluetooth® App.

Simple. Robust.
CLASSEQ



Tel: +44 (0)1889 272338 | classeq.co.uk

Scan to download the Classeq App for performance insights and useful guides.