


SCH 20

Self Contained Ice Machine 22 kg



Item
Project
Quantity

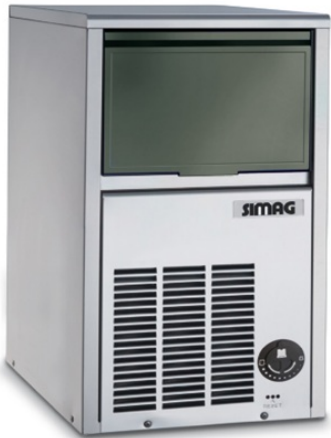

- FEATURES**
- Resistant stainless steel exterior.
 - Low power and water consumption
 - Reduced dimensions
 - Optimum ratio between ice production and bin capacity
 - R290 refrigerant
 - XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



SCH M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

**CONDENSING
SYSTEM**

Water cooled
Air cooled

REFRIGERANT GAS

R290

**VOLTAGE
V/HZ/PH**

230\50\1

Model	Cube	Ø	H	Weight
SCH M	Medium	30 mm	34 mm	20 g

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.simag.it

Self Contained Ice Machine 22 kg

May 2025


SCH 20

Self Contained Ice Machine 22 kg

SIMAG

Item
Project
Quantity

Self Contained Ice Machine 22 kg

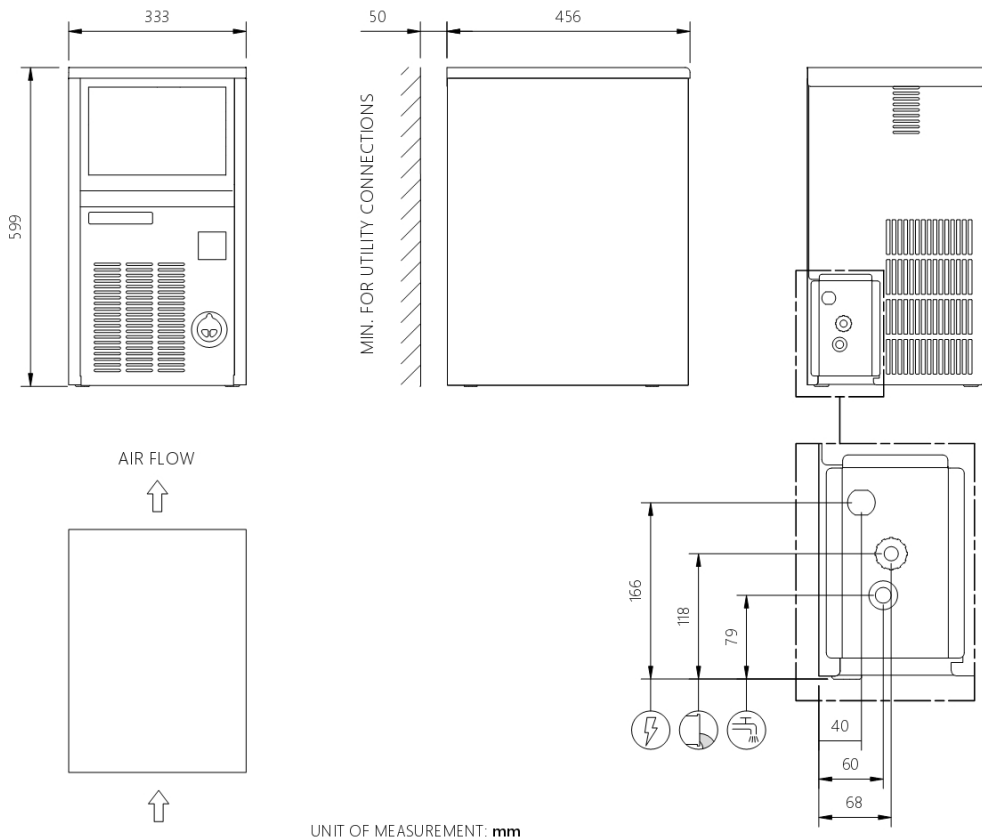

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions							
Size (W x D x H)			Size (W x D x H)										
334 x 457 x 597 mm			400 x 530 x 740 mm										
Net weight			Gross weight										
28 kg			33kg										
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A	
			kg	kg	kg								
SCH 20 WS	230\50\1	W	22	21	18	8	0,6	5	24	250	3 x 1,5	10	
SCH 20 AS	230\50\1	A	20	19	13	6	0,4	4	4	250	3 x 1,5	10	