

SCH 105 *XSafe*

Self Contained Ice Machine 90 kg



Item
Project
Quantity

					FEATURES • Resistant stainless steel exterior. • Low power and water consumption • Reduced dimensions • Optimum ratio between ice production and bin capacity • R290 refrigerant • Magnetic Ice Scoop																	
 SCH L Large Gourmet 39 g Ø 38 mm - H 41 mm  SCH M Medium Gourmet 20 g Ø 30 mm - H 34 mm					CONDENSING SYSTEM air cooled water cooled																	
					REFRIGERANT GAS R290																	
					VOLTAGE V/HZ/PH 230\50\1																	
Model	Cube	Ø	H	Weight																		
SCH L	Large	38 mm	41 mm	39 g																		
SCH M	Medium	30 mm	34 mm	20 g																		
CERTIFICATIONS    					OPERATING REQUIREMENTS <table><tr><td></td><td>Minimum</td><td>Maximum</td></tr><tr><td>Air temperature</td><td>10</td><td>43</td></tr><tr><td>Water temperature</td><td>5</td><td>38</td></tr><tr><td>Water pressure</td><td>1 bar (14 psi)</td><td>5 bar (70 psi)</td></tr><tr><td>Electrical voltage</td><td>-10%</td><td>+10%</td></tr></table>				Minimum	Maximum	Air temperature	10	43	Water temperature	5	38	Water pressure	1 bar (14 psi)	5 bar (70 psi)	Electrical voltage	-10%	+10%
	Minimum	Maximum																				
Air temperature	10	43																				
Water temperature	5	38																				
Water pressure	1 bar (14 psi)	5 bar (70 psi)																				
Electrical voltage	-10%	+10%																				
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.					www.simag.it																	

Self Contained Ice Machine 90 kg

SCH 105 *XSafe*

Self Contained Ice Machine 90 kg


SIMAG

Item

Project

Quantity

Self Contained Ice Machine 90 kg

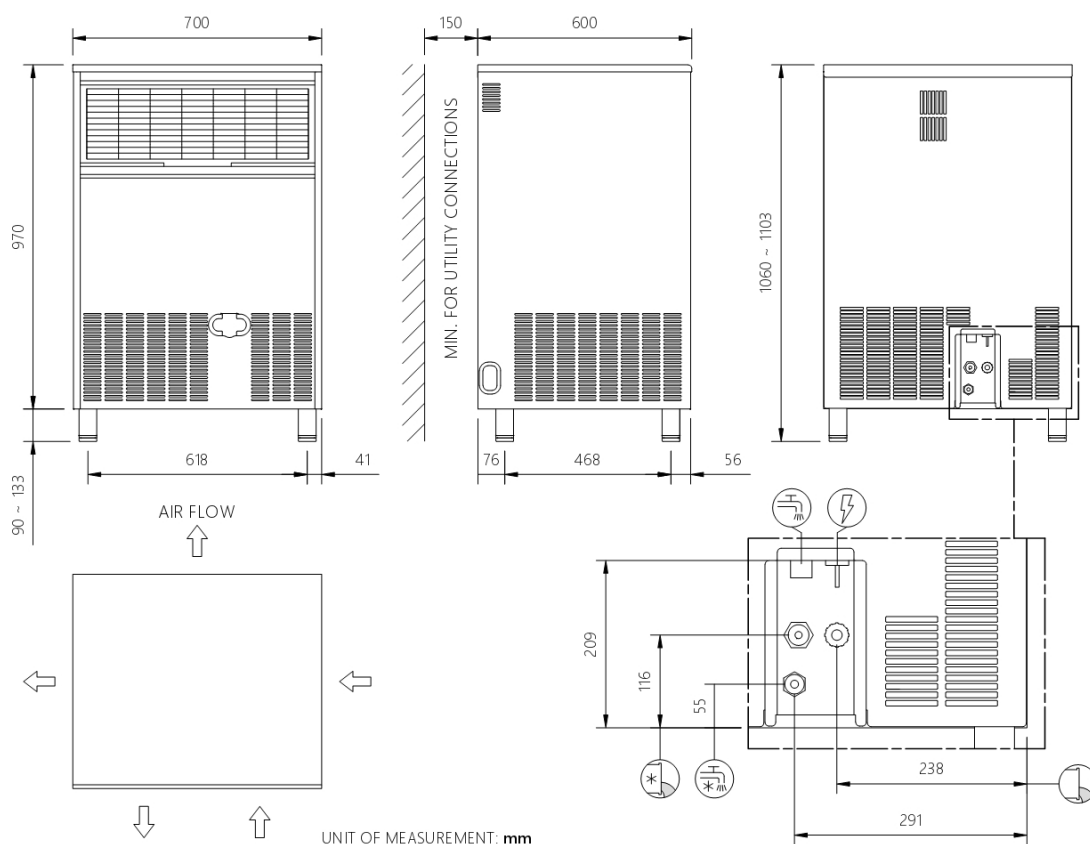

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)									
700 x 600 x 970 mm			770 x 680 x 1050 mm									
Net weight			Gross weight									
62 kg			69kg									
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
SCH 105 AS OX	230\50\1	A	90	87	71	49	1,5	15	9	770	3 x 1,5	10
SCH 105 WS OX	230\50\1	W	88	86	76	49	1,7	13	59	560	3 x 1,5	10
SCH L 105 AS	230\50\1	A	76	74	61	49	1,0	14	9	730	3 x 1,5	10

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg