


VOGUE

Model: CC344 Lever Basin Taps (2 Pack)

- Outlet flow rate: 25.46L (6.7GPM) / 0.414Mpa
- Max pressure: 10 bar (1.0Mpa)
- Min pressure: 1 bar (0.1Mpa)
- Recommended working water pressure: 0.31Mpa
- Hyper pressure scale: $\pm 10\%$

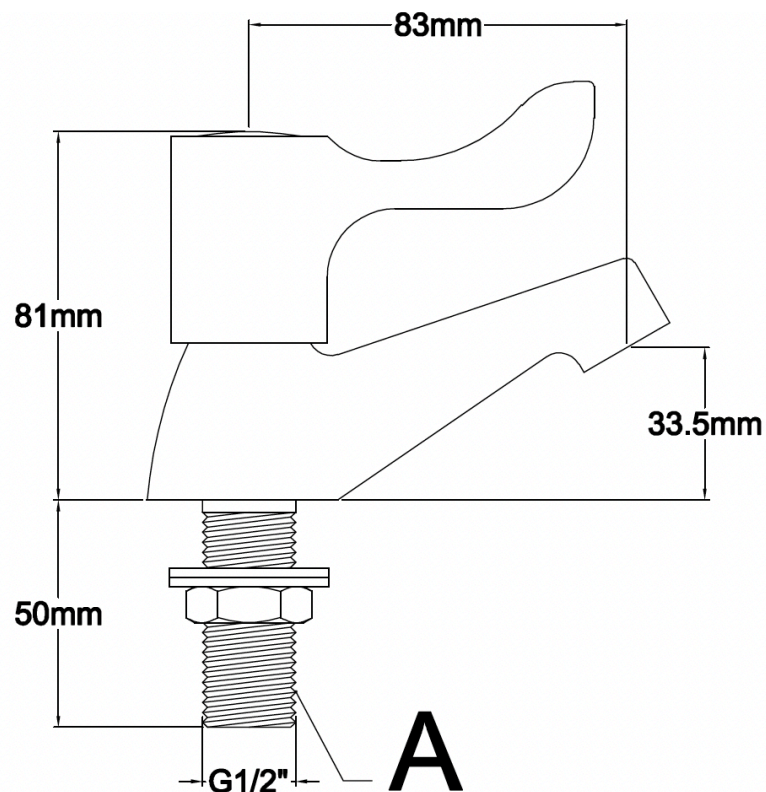


A
Opening size: $\varnothing 22\text{mm}$

Safety Instructions

- The tap has been professionally tested and adjusted in the factory. Do not disassemble or re-assemble it by yourself.
- Clean the inlet pipe before installation to avoid tap being clogged up and thus affecting the water flow.
- The size of deck mounting shall be subject to specifications as indicated in the above diagram.
- After installation done, check the sealing condition of all joints and ensure there is no leakage.

Installation

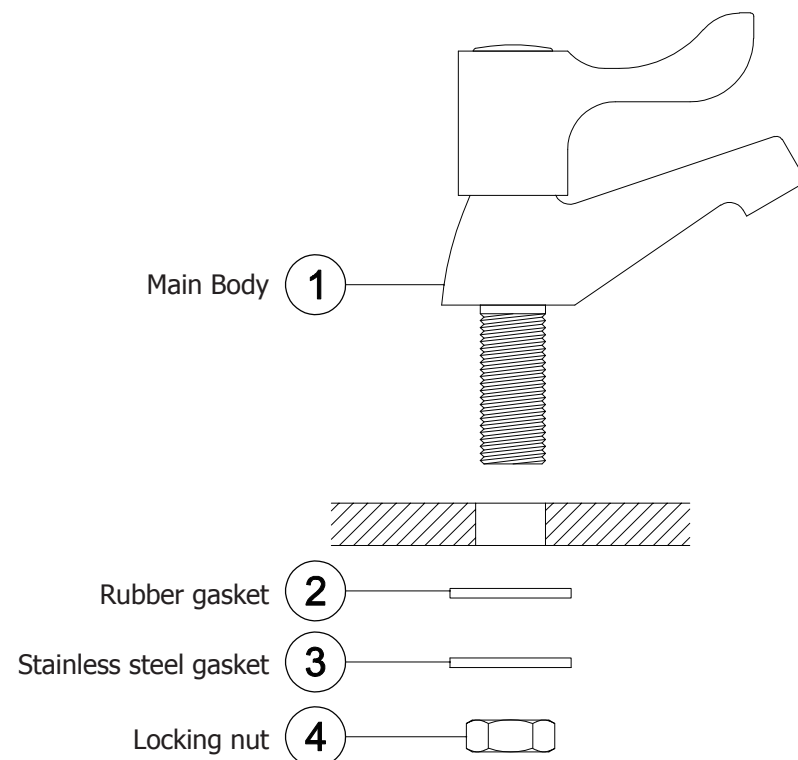

Note: Remove all packaging and dispose of it safely. Ensure that at the time of unpacking the contents are supplied fully and free of damage.

1. Remove the locking nut, stainless steel gasket, and rubber gasket from the main body.
2. Place the main body on the pre-drilled tabletop and adjust its position (using the recommended hole size as indicated).
3. Insert the rubber gasket into the connecting pipe on the other side of the wall.
4. Insert the stainless steel gasket and locking nut, then tighten the nut with a wrench.
5. Connect the water inlet hose G1/2" interface at the bottom to allow water to flow.
6. Turn on the water supply and check for leaks.

Please click on the URL below or scan the QR code for more information on the product:

CC344:

<https://catering-brands-directory.com/product-passport/CC344/>

voque-cookware.com
enquiries@voque-cookware.com



CC344_ML_A4_v1_2026/09/28