



PRODUCT FEATURES

- Hinged rear door
- Solid glass front
- Single glazed
- Three adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75⁰ factory set point




Model	Cabinet			Shelving no.	Display m2	Total food units	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm			100 X 100 mm			50/60 Hertz
STGHT6	600	650	920	3 + base	0.80	55	4.6 Amp	10amp 3 pin plug	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

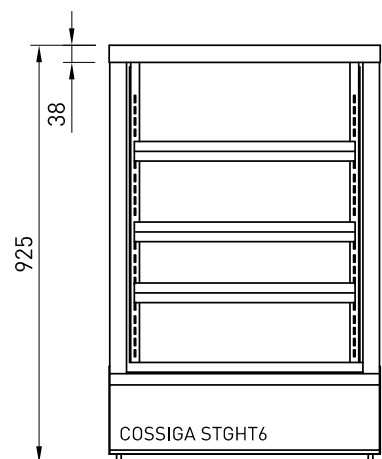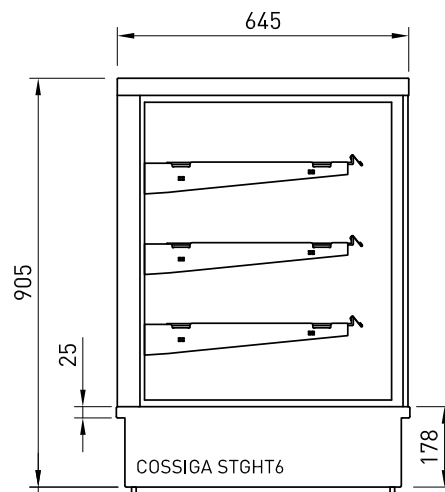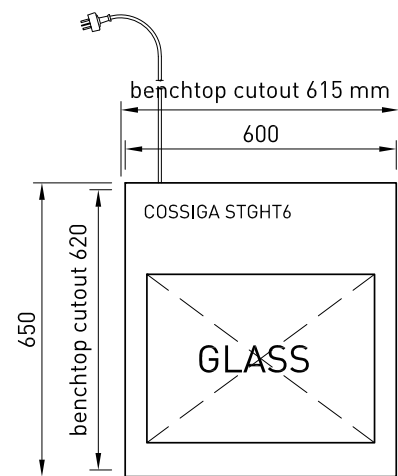



PRODUCT FEATURES

- Sliding rear doors
- Solid glass front
- Single glazed
- Three adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75⁰ factory set point




Model	Cabinet			Shelving no.	Display m2	Total food units	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm			100 X 100 mm			50/60 Hertz
STGHT9	900	650	920	3 + base	1.27	84	6.2 Amp	10amp 3 pin plug	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

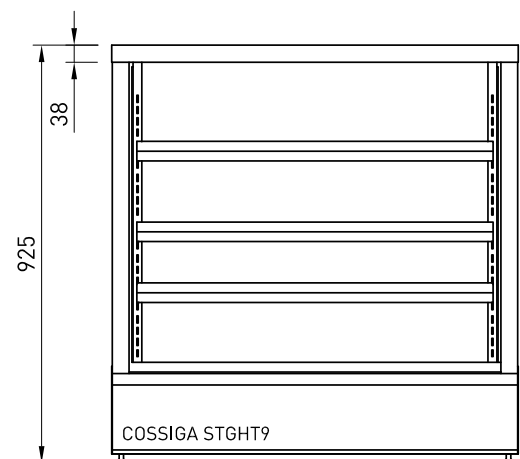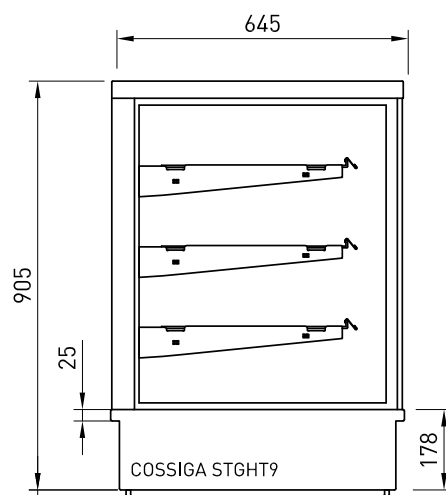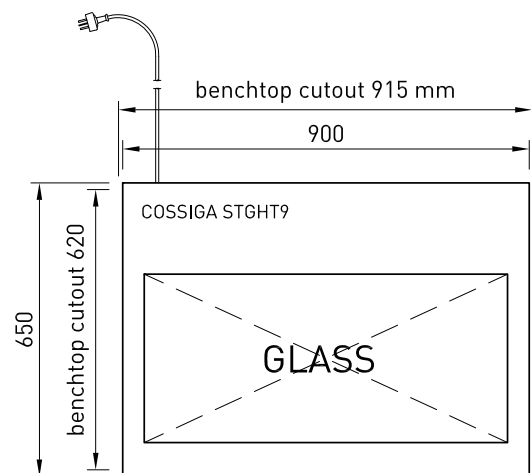



PRODUCT FEATURES

- Sliding rear doors
- Solid glass front
- Single glazed
- Three adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75⁰ factory set point




Model	Cabinet			Shelving no.	Display m2	Total food units	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm			100 X 100 mm			50/60 Hertz
STGHT12	1200	650	920	3 + base	1.75	121	7.7 Amp	10amp 3 pin plug	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

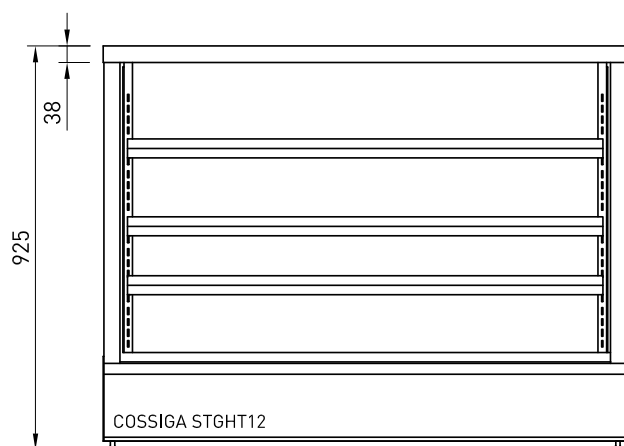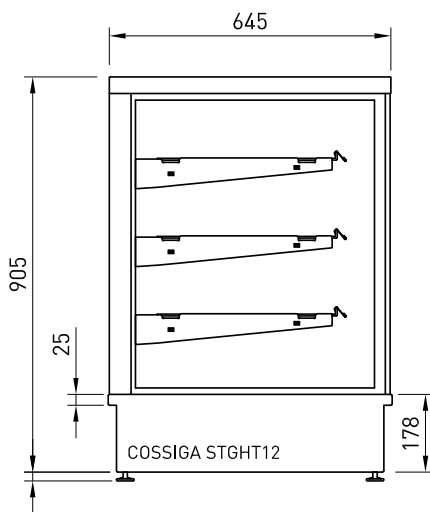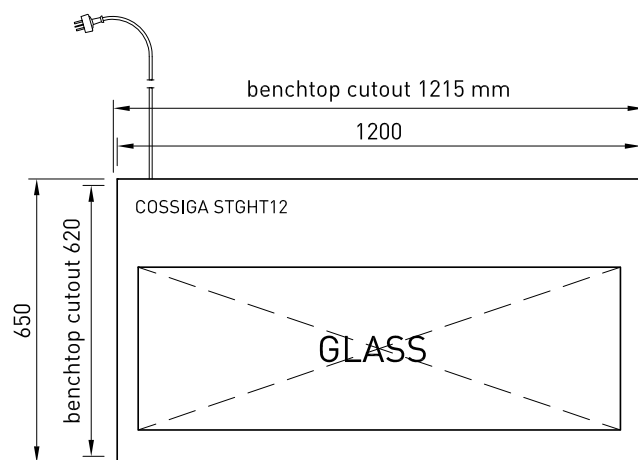



PRODUCT FEATURES

- Heated double glazed glass top and sides
- Sliding doors front and hinged rear Double glazed
- Deck forced refrigeration
- Two adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights
- Integral condenser
- Self evaporating

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point



Model	Cabinet			Shelving no.	Display m2	Total food units	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm			100 x 100 mm				50/60 Hertz
STGRF6 -SD	600	650	925	2 + base	0.61	55	134a	4.7 Amp	10amp 3 pin plug	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating temperature climate class N max 32°C

Maximum shelf load weight 15kg
spread evenly

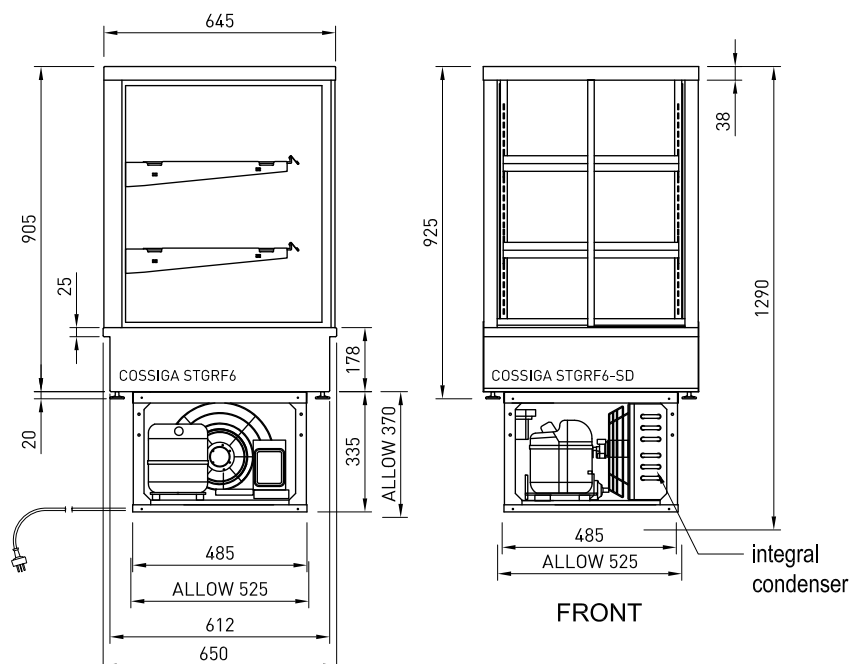



PRODUCT FEATURES

- Heated double glazed glass top and sides
- Sliding doors front and rear Double glazed
- Deck forced refrigeration
- Two adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights
- Integral condenser
- Self evaporating

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point



Model	Cabinet			Shelving no.	Display m2	Total food units	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm			100 x 100 mm				50/60 Hertz
STGRF9-SD	900	650	925	2 + base	0.96	84	134a	5.0 Amp	10amp 3 pin plug	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating temperature climate class N max 32°C

Maximum shelf load weight 15kg
spread evenly

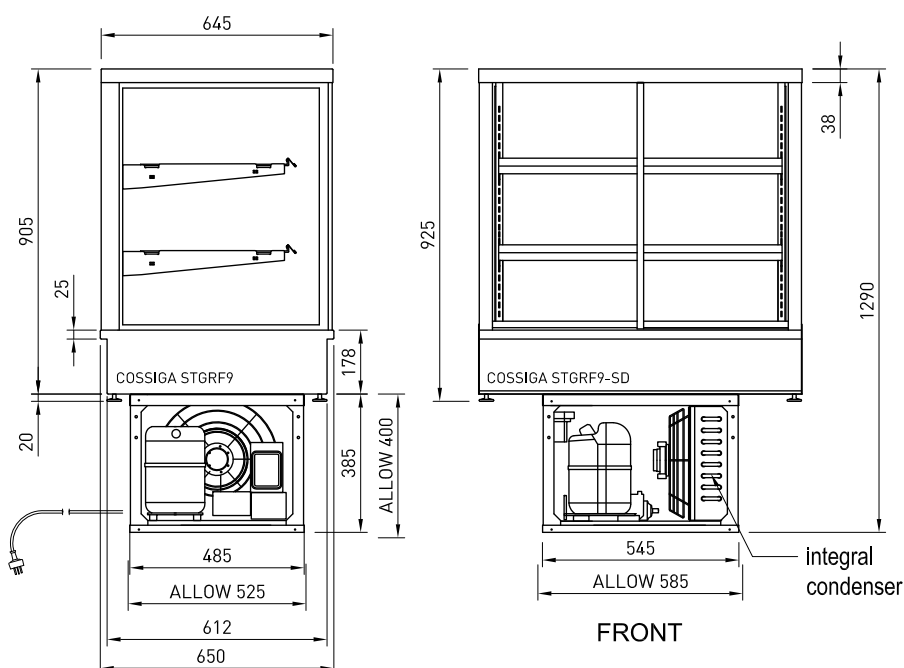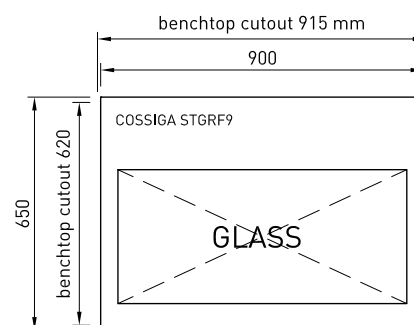

STG RF12-SD

TOWER COUNTER SERIES

COSSIGA



PRODUCT FEATURES

- Heated double glazed glass top and sides
- Sliding doors front and rear Double glazed
- Deck forced refrigeration
- Two adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights
- Integral condenser
- Self evaporating

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point




Model	Cabinet			Shelving no.	Display m2	Total food units	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm			100 x 100 mm				50/60 Hertz
STGRF12-SD	1200	650	925	2 + base	1.32	121	134a	6.8 Amp	10amp 3 pin plug	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating temperature climate class N max 32°C

Maximum shelf load weight 15kg
spread evenly

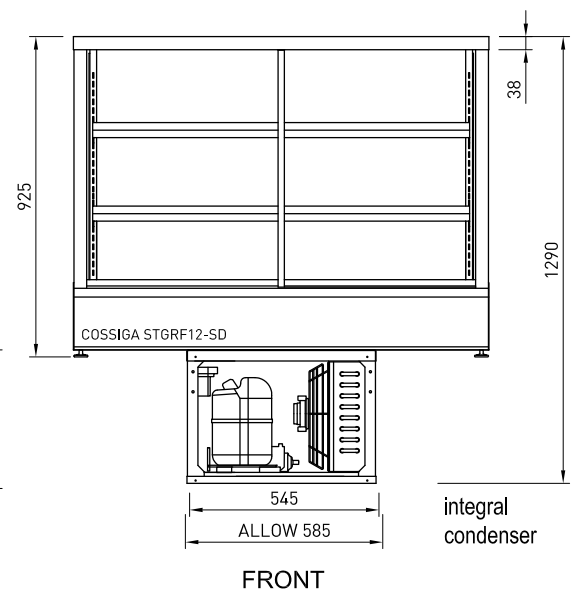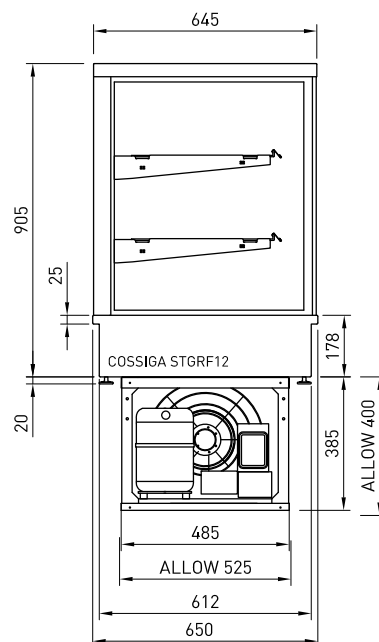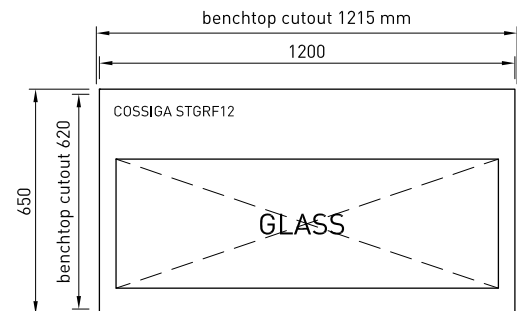

STG RF15-SD

TOWER COUNTER SERIES

COSSIGA



PRODUCT FEATURES

- Heated double glazed glass top and sides
- Sliding doors front and rear Double glazed
- Deck forced refrigeration
- Two adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights
- Integral condenser
- Self evaporating

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			Shelving no.	Display m2	Total food units	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm			100 x 100 mm				50/60 Hertz
STGRF15-SD	1500	650	925	2 + base	1.67	154	134a	7.0 Amp	10amp 3 pin plug	240V

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating temperature climate class N max 32°C

Maximum shelf load weight 15kg
spread evenly

