



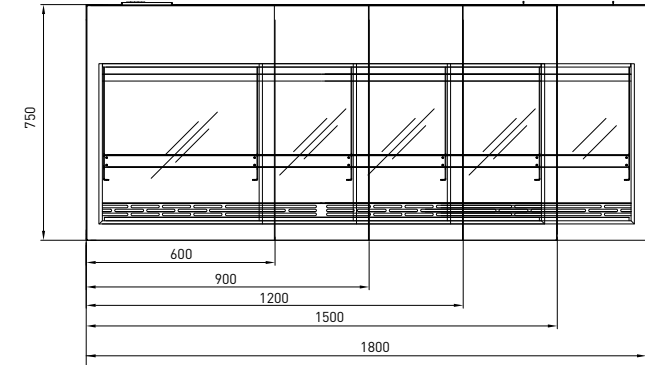

## AB

BTG AB6  
BTG AB9  
BTG AB12  
BTG AB15


- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional
- Ambient converted from heated
- Air removal fan installed in ceiling





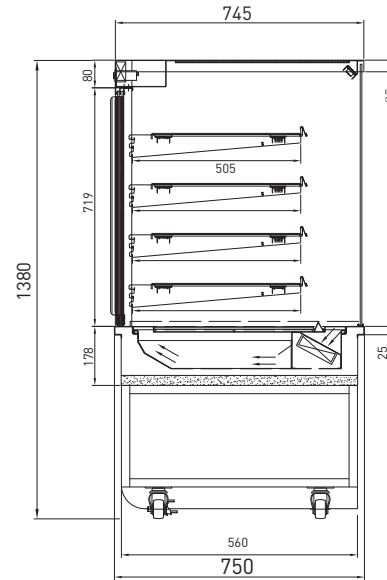



## CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			SHELVING	OPERATING TEMP	POWER CORD LENGTH	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]													DEG C	W X D	W X D	100MM UNITS
BTGAB6	600	750	1380	4 + BASE	N/A	2200MM	490 X 445	540 x 510	100	1.14	0.29	50/60 HZ	0.2 AMP	10 AMP 3 PIN PLUG	220-240V	700	830	1550	133
BTGAB9	900	750	1380	4 + BASE	N/A	2200MM	790 X 445	840 x 510	168	1.83	0.45	50/60 HZ	0.3 AMP	10 AMP 3 PIN PLUG	220-240V	1000	830	1550	133
BTGAB12	1200	750	1380	4 + BASE	N/A	2200MM	1090 X 445	1140 x 510	255	2.52	0.60	50/60 HZ	0.4 AMP	10 AMP 3 PIN PLUG	220-240V	1300	830	1550	157
BTGAB15	1500	750	1380	4 + BASE	N/A	2200MM	1390 X 445	1440 x 510	355	3.20	0.75	50/60 HZ	0.5 AMP	10 AMP 3 PIN PLUG	220-240V	1600	830	1550	158


Maximum shelf load weight 15kg spread evenly

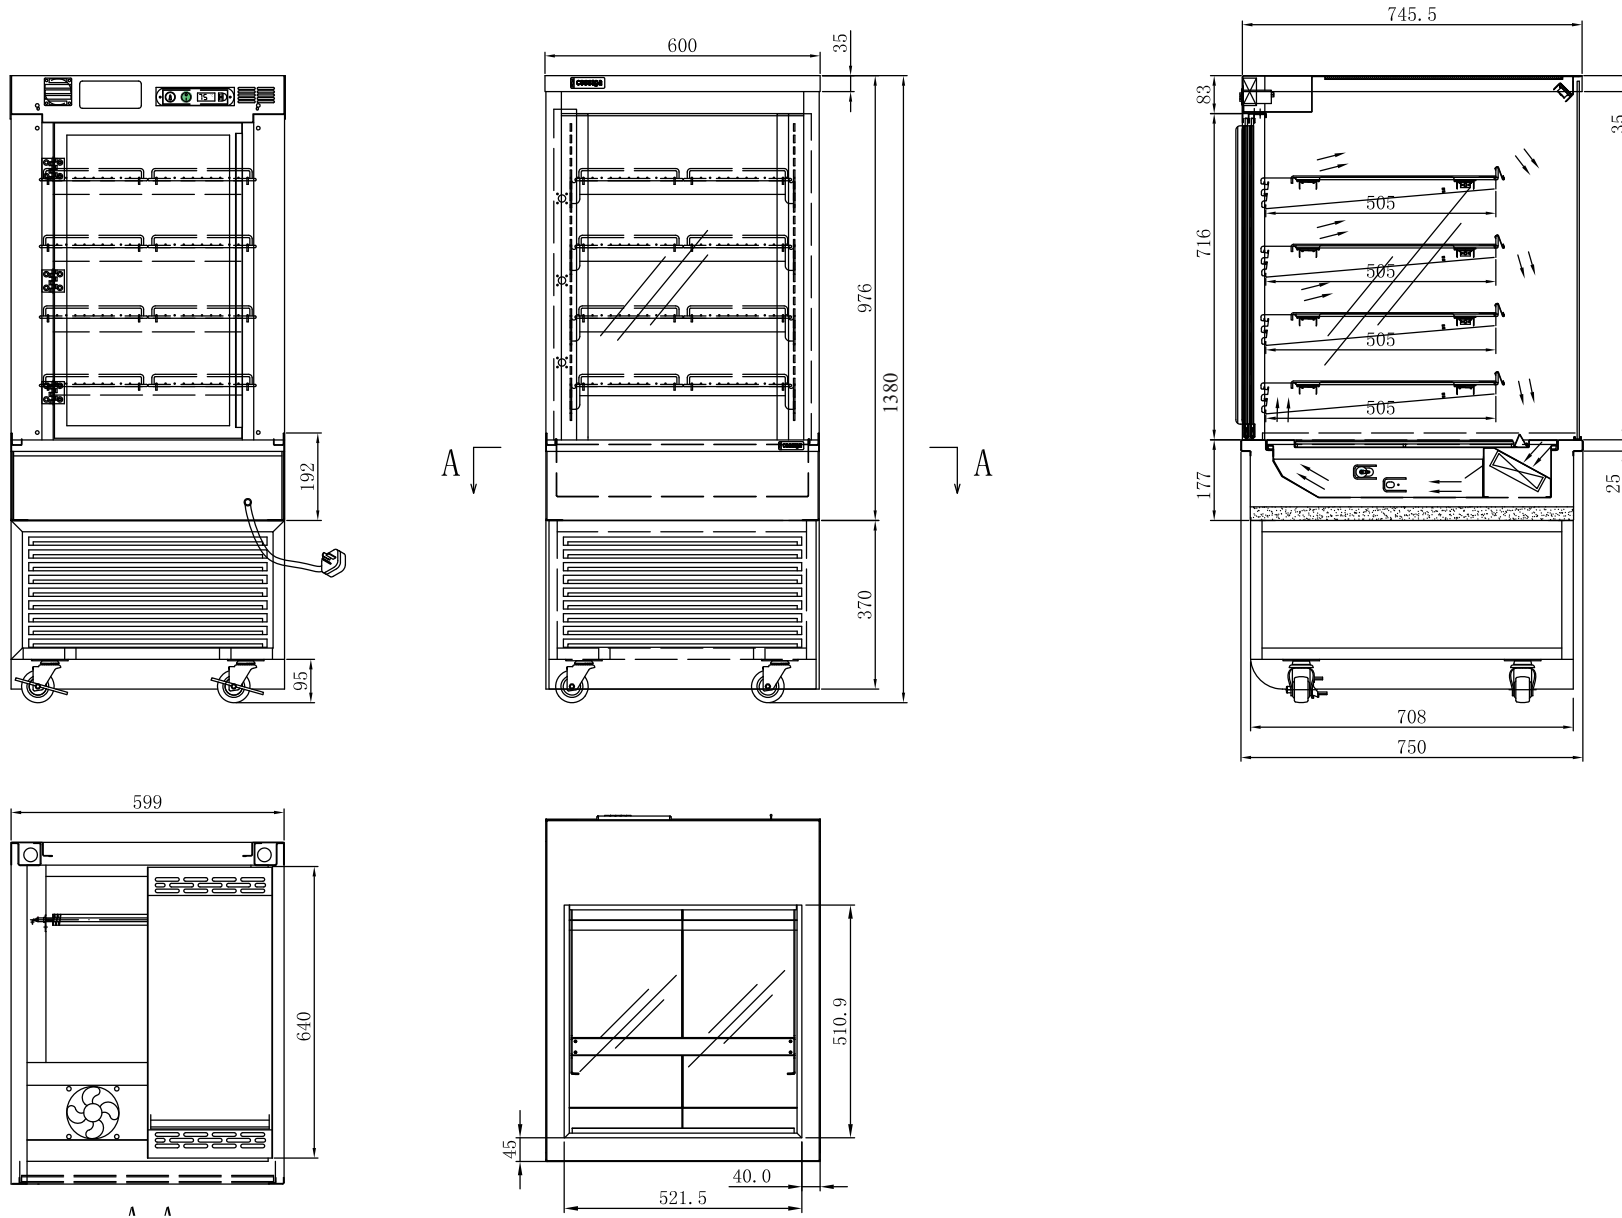

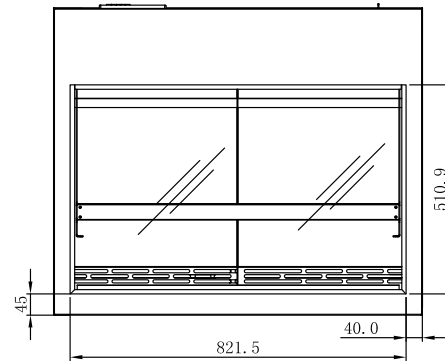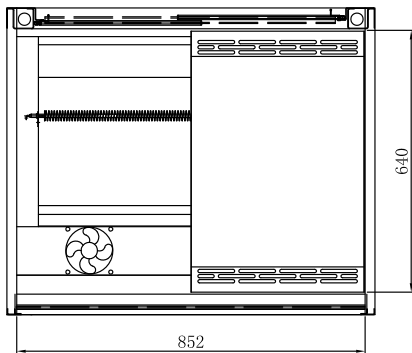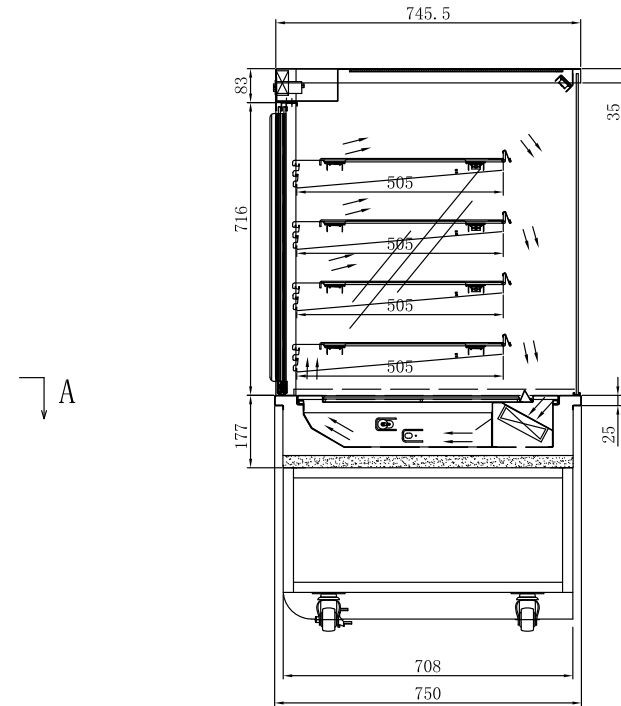
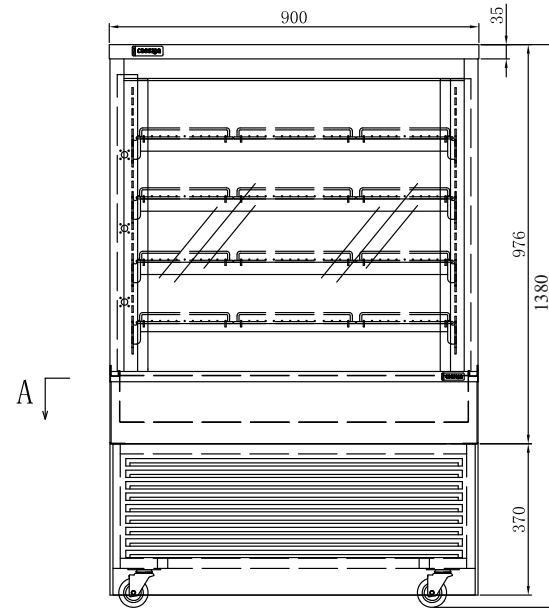
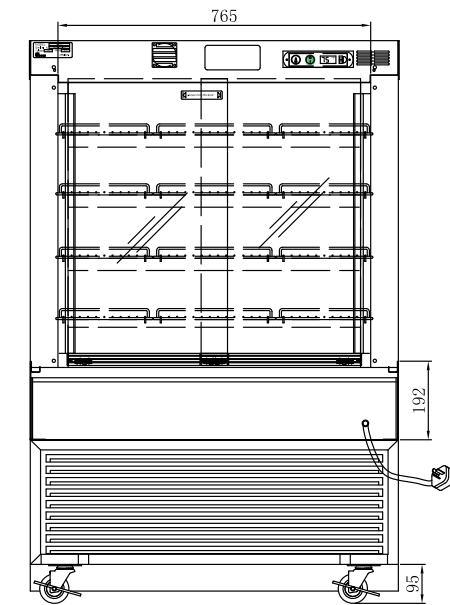






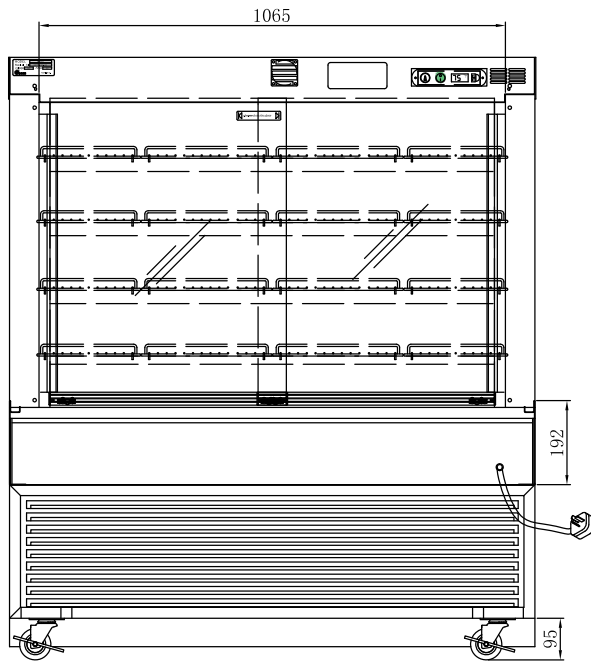


A

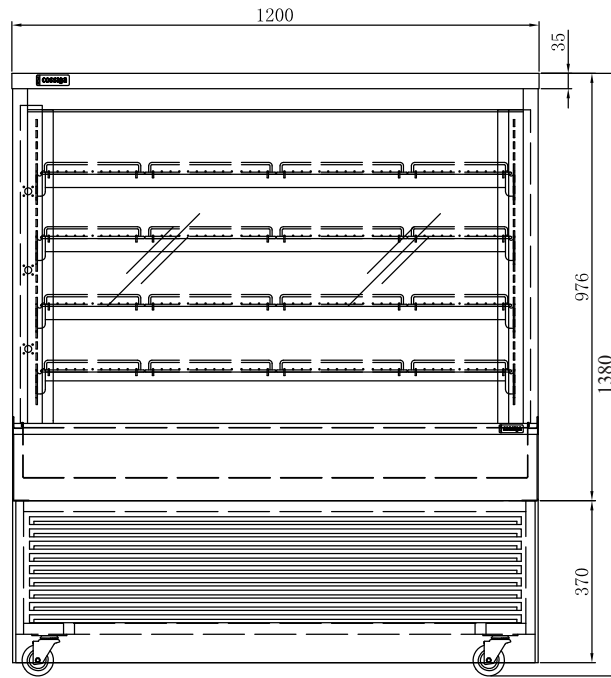


A

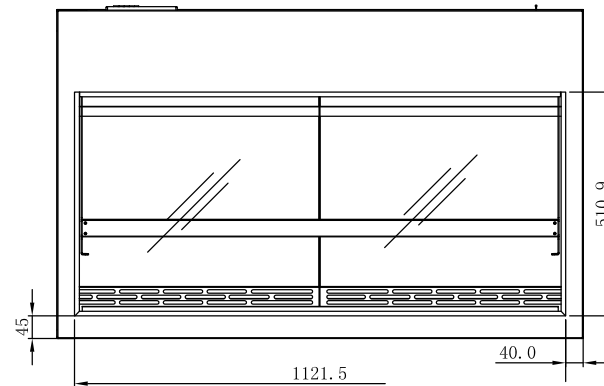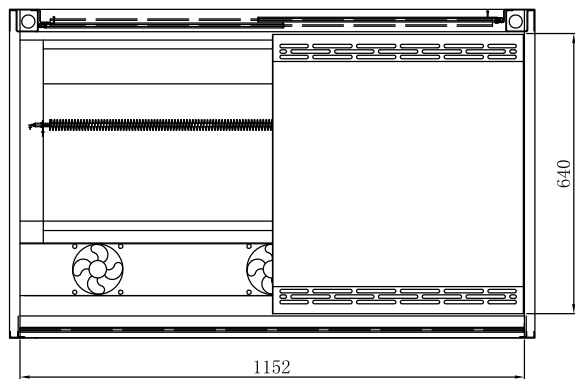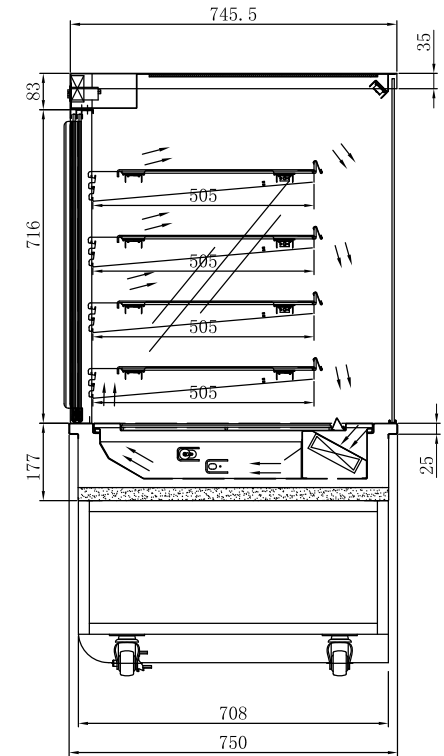

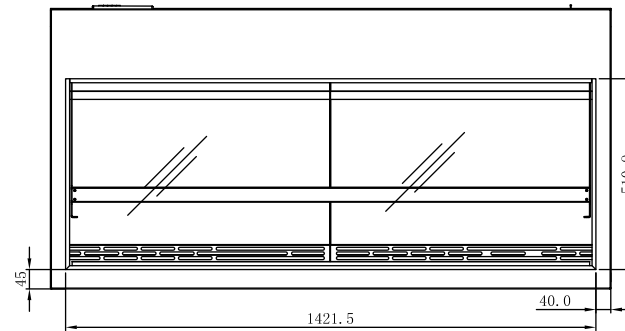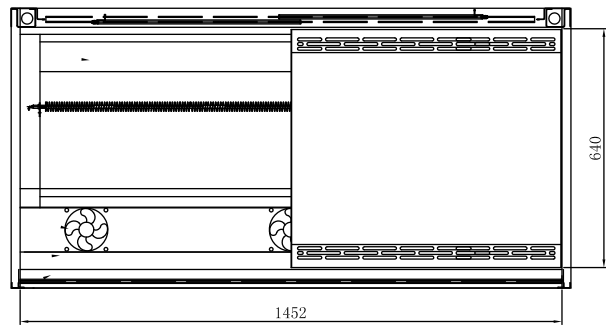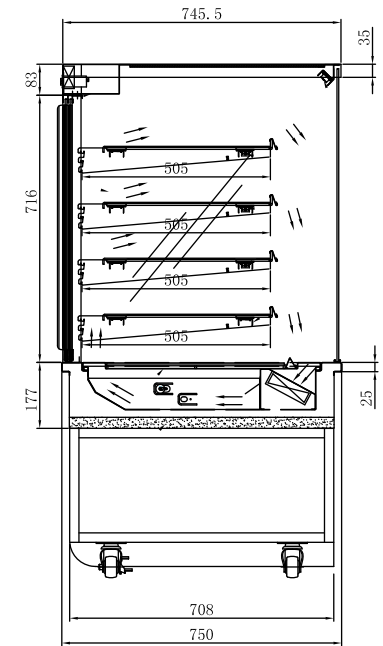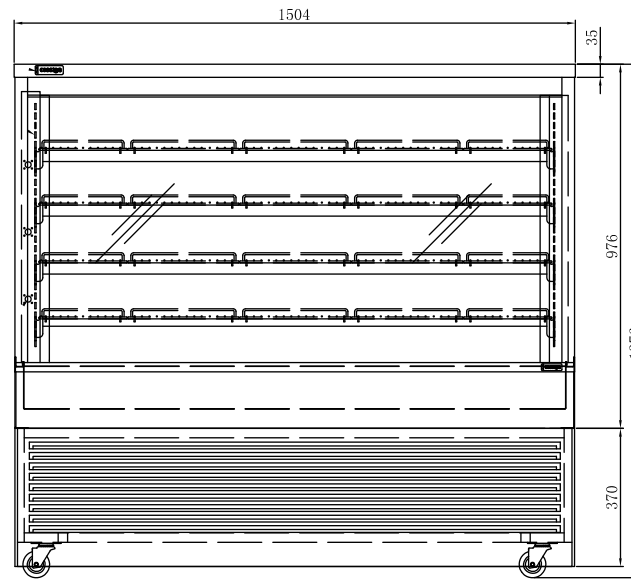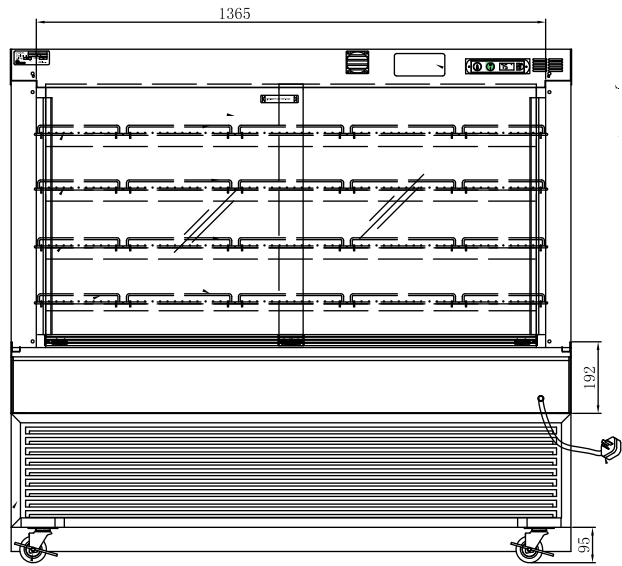


A-A

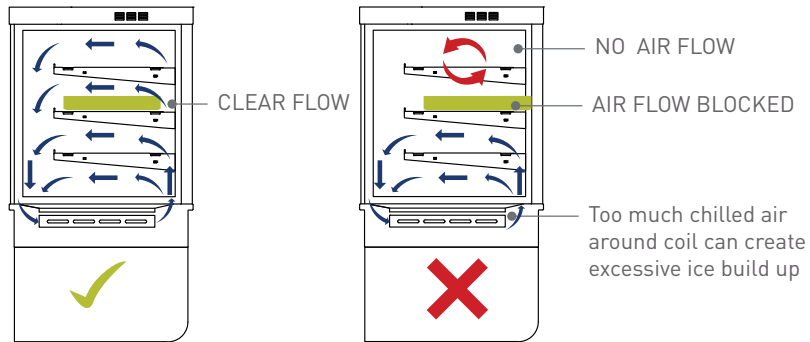

## CORRECT AIRFLOW


## IN CORRECT AIRFLOW

- Blocked air flow will retard operation on both HOT and COLD units
- Ensure trays or plates are not blocking air flow at rear

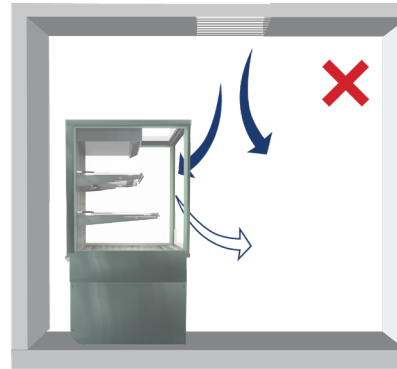


## Mechanical airflow

Mechanical air flows, such as diffusers and fans can disturb the air curtain on open fronted units causing failure

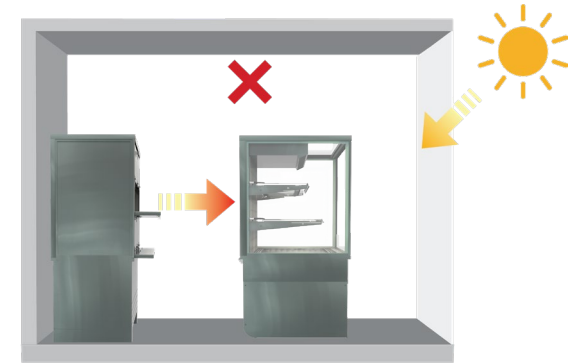

## Environmental conditions

Heat from other equipment and natural conditions, such as direct sunlight straight on units, can cause cooling to fail and overload compressor

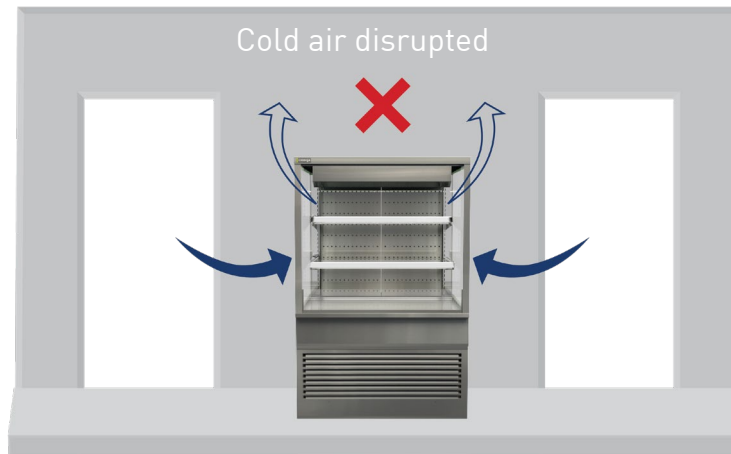

## Locations to avoid

- Close to shop front exterior
- In an outside location
- In direct sunlight
- In a high wind
- Near any source producing excessive heat
- Service units more frequently in dusty or polluted areas

## Dropped Into Benchtop

Unit is dropped in to hole cut in bench top and supported by front and rear flange of unit.

MODEL	CUT OUT SIZE
BTG6	615 X 720
BTG9	915 X 720
BTG12	1215 X 720
BTG15	1515 X 720



## Parts removed

Castors, front and side panels removed. Rear panels / grill remain for personnel safety.

## Placed Into Benchtop from rear

Unit is slid into custom built frame from rear and supported by the sides of the unit base frame. L shaped supports shown in red in this example.









## Create your own panels

Supplied by customer

Easy install option to eliminate a nib wall  
Simply roll in and clip on

Clip on panels can be in up to 16 mm MDF  
Meltica finish or similar.

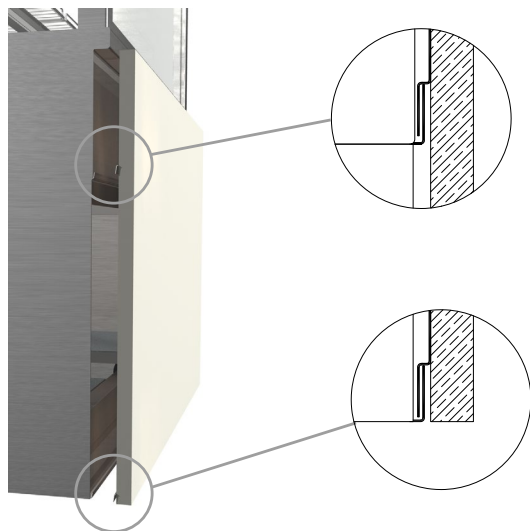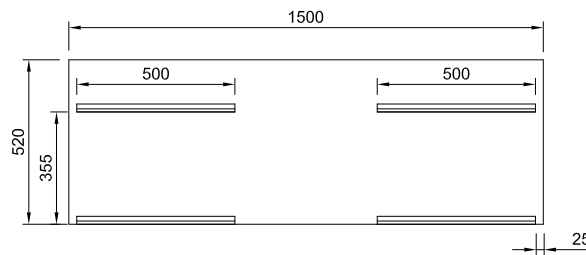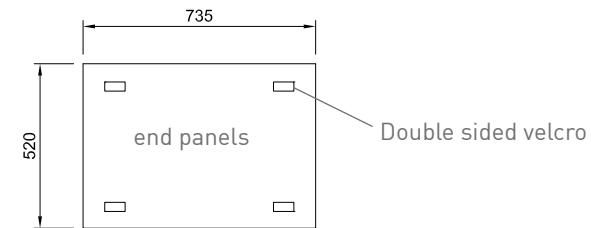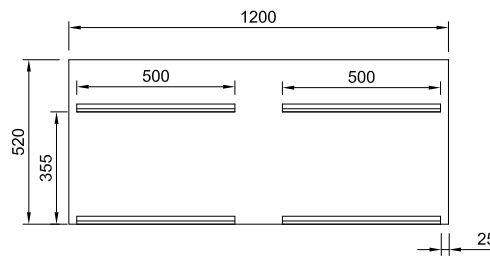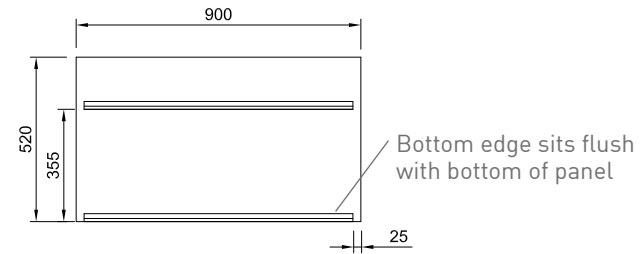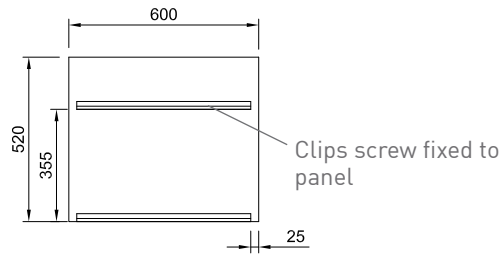


## Integrated Clip System - Bracket fixing to joinery panels





## SELF SERVICE SYSTEM

- Each unit is self contained
- Roll-in - Roll-out
- Install in minutes
- No on site joinery work required
- Ease of cleaning and servicing
- Mobile and flexible
- Easy to upgrade front panel design
- Custom branding strip
- Rear service or against wall
- All parts as optional component kits
- Ideal solution for temporary events

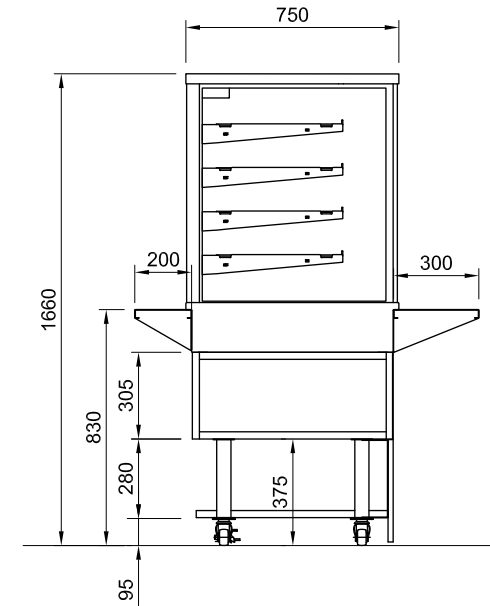

Optional bottom shelf kit for chilled units  
Ensure chilled units are kept well ventilated

Vent required through front panel

Optional bottom meltica shelf kit - BY OTHERS




Optional rear loading shelf kit  
200mm deep

Optional bottom meltica shelf kit - BY OTHERS

## Top Mounted Controller Panel

For against wall installations  
Sold individually

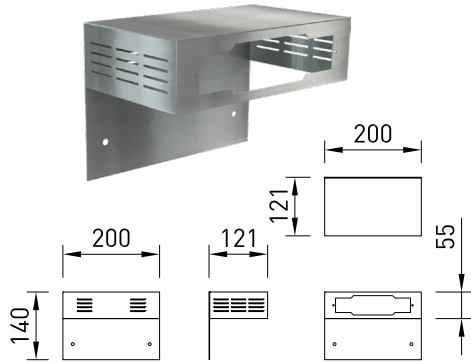


## Price Tabs

Stainless Steel  
Write on with marker or adhesive tape  
Measure 60mm x 30mm  
Sold in packs of 20



## Front and Rear Work Shelves


Stainless Steel  
Sold individually

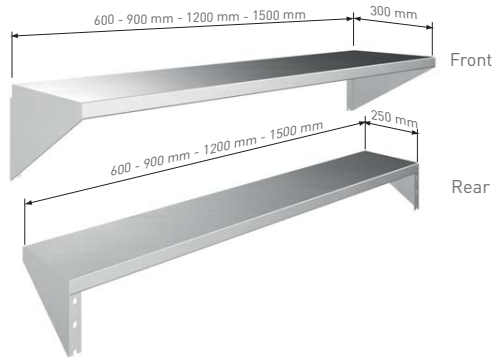

## Castor Extension Kit

Increases cabinet height to 1660mm

Set of four, uses existing castors, includes fixing bolts and washers

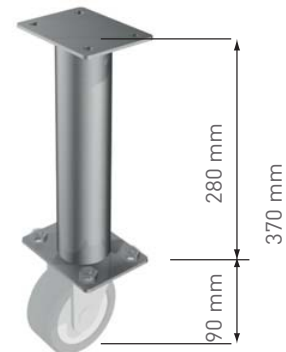

## Base Tray - Heated Units

Stainless Steel  
For heated units  
Sold in pairs




## Tong Holder

Stainless Steel  
Drop into counter tray race  
Sold individually




## Bag Holder




## Humidity Dish

Stainless Steel  
Perforated lid is removable

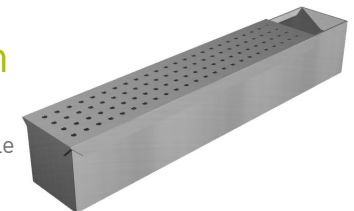




Shelf with ticket strip attached

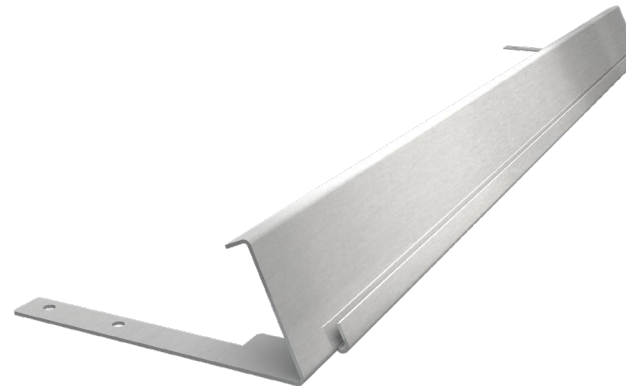

**Ticket Strip**  
Stainless Steel  
Attaches to shelf frame



**End Profile**


## Lengths

CABINET LENGTH MM	TICKET STRIP LENGTH
600	475
900	775
1200	1075
1500	1375
1800	810 X 2

## Price Tabs

Stainless Steel  
Write on with marker or adhesive tape  
Measure 60mm x 30mm  
Sold in packs of 20



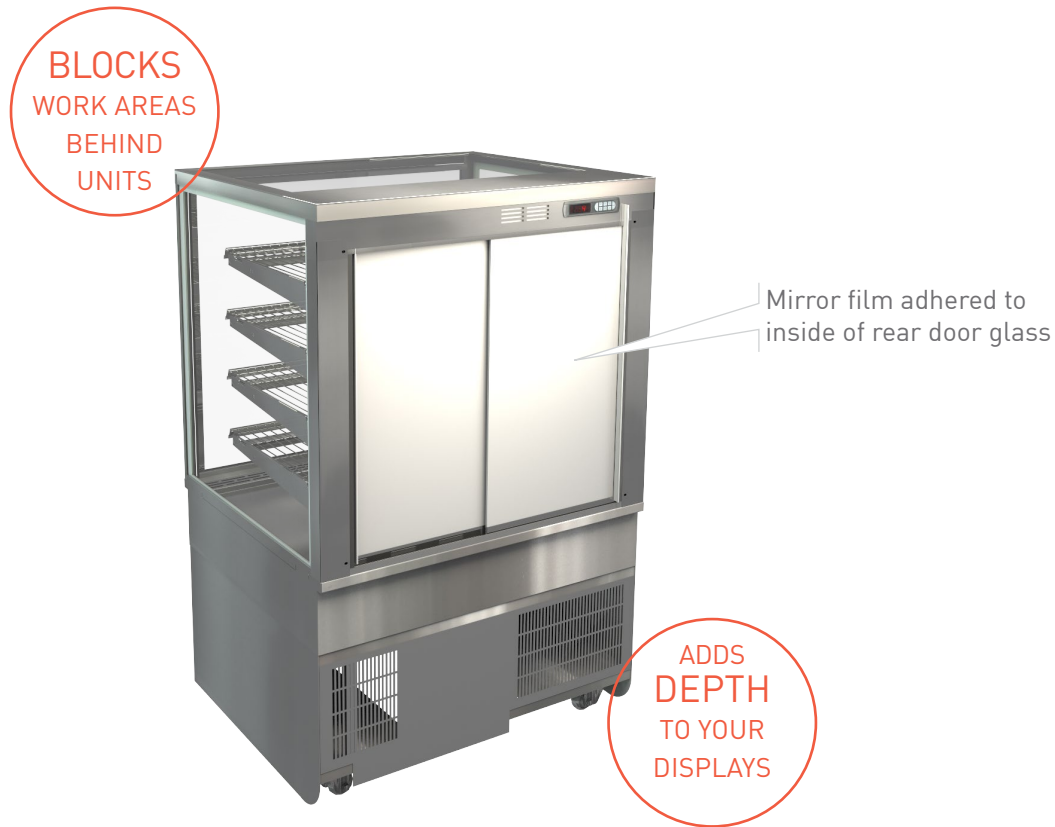


## MIRROR FILM


- Applied to the inside glass rear doors
- Suitable for heated and chilled units

## Glass Shelf Options

Standard wire racks are removed and replaced with 6mm toughened glass panes

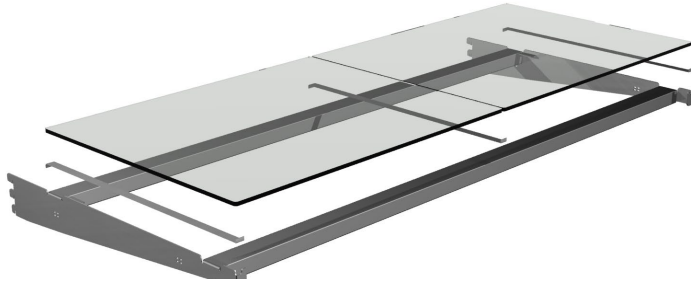

Stainless Steel glass shelf support bracket

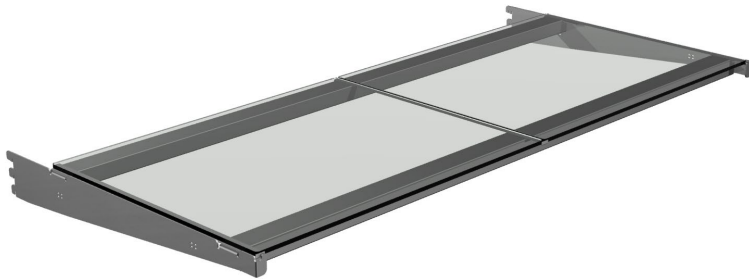


Maximum shelf load weight 15kg spread evenly



MODEL	GLASS	WIDTH MM	DEPTH MM	PER SHELF PANES	SHELVES	TOTAL PANES
BTGRF6	6MM TOUGHENED - POLISHED EDGES	240	430	2	3	6
BTGRF9	6MM TOUGHENED - POLISHED EDGES	390	430	2	3	6
BTGRF12	6MM TOUGHENED - POLISHED EDGES	540	430	2	3	6
BTGRF15	6MM TOUGHENED - POLISHED EDGES	690	430	2	3	8
BTGHT6	6MM TOUGHENED - POLISHED EDGES	240	430	2	4	8
BTGHT9	6MM TOUGHENED - POLISHED EDGES	390	430	2	4	8
BTGHT12	6MM TOUGHENED - POLISHED EDGES	540	430	2	4	8
BTGHT15	6MM TOUGHENED - POLISHED EDGES	690	430	2	4	8

## Pie Trays

Stainless Steel Construction

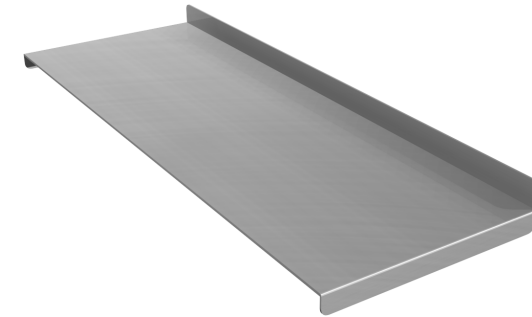


PIE TRAYS					
MODEL	NO. OF SHELF TRAYS	WIDTH MM	DEPTH MM	PER SHELF	TOTAL
BTGHT6	4 PER SHELF	120	445	4	16
BTGHT9	6 PER SHELF	130	445	6	24
BTGHT12	9 PER SHELF	120	445	9	36

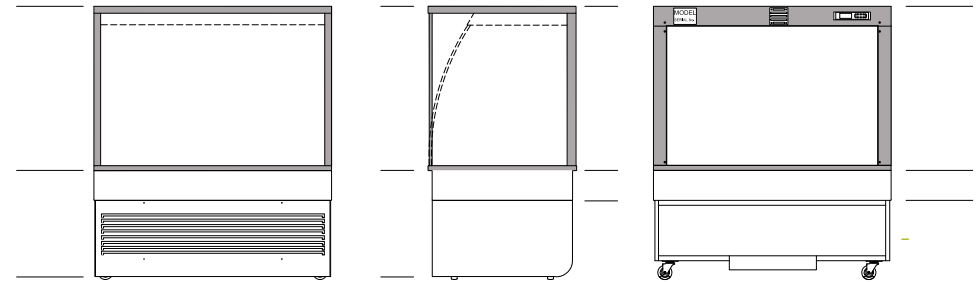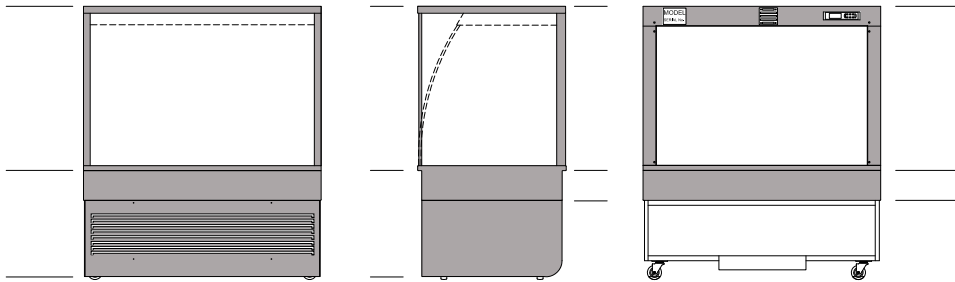

## FREE STANDING - CURVED OR SQUARE

all exterior visible areas covered

all exterior top visible areas covered

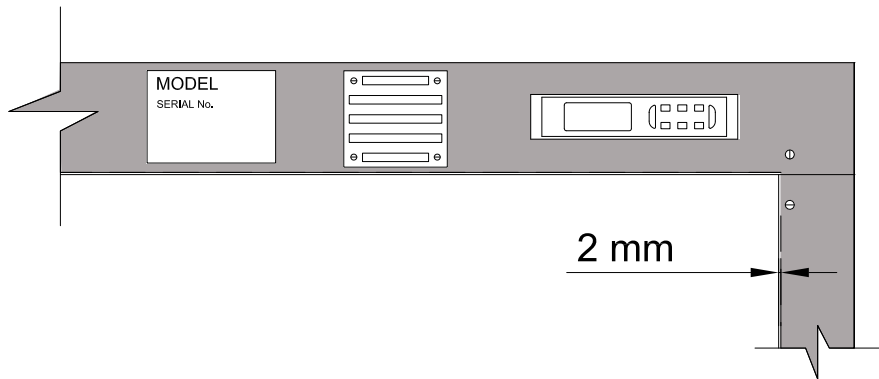

2mm gap left around rear frame

Rear of units cut around serial number plate, exhaust fan and controller



## WRAP TRIMMING