



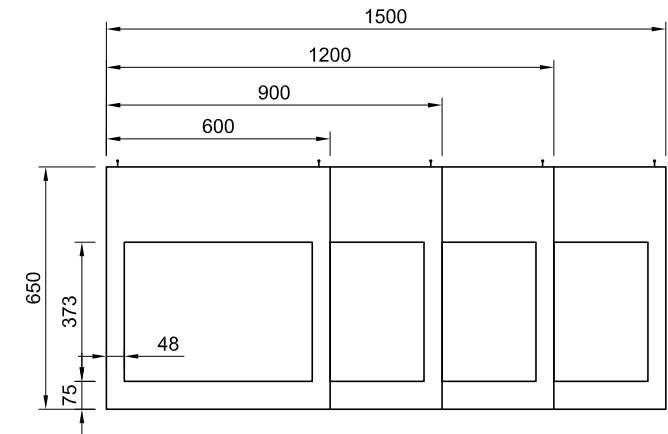

## RF

STG RF6  
STG RF9  
STG RF12  
STG RF15

- Heated double glazed glass top, sides and solid front
- Deck forced refrigeration
- Sliding doors front and rear
- Double glazed
- Two adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights
- Integral condenser
- Self evaporating
- Solid glass front - optional
- STG RF6 hinged rear door

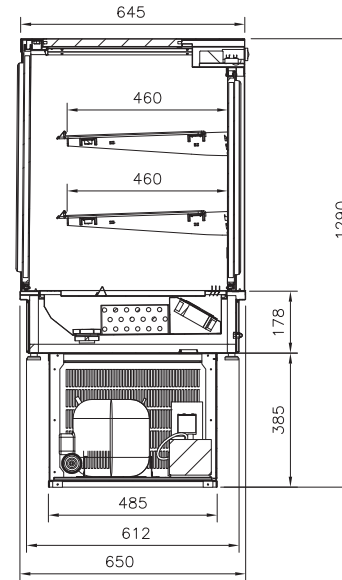


## CABINET DIMENSIONS & SPECIFICATIONS


MODEL	CABINET				SHELVING		REFRIGERANT	TOTAL FOOD	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING				
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	CUT OUTS	NO.	SIZE W X D								LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	CUBE
STGRF6-SD STGRF6	600	650	925	615x620	2+BASE	490 X 395	134A	55	0.61	0.22	4.3AMP	10 AMP 3 PIN PLUG	220~240V	700	730	1400	143	0.72
STGRF9-SD STGRF9	900	650	925	915x620	2+BASE	790 X 395	134A	84	0.96	0.34	4.5AMP	10 AMP 3 PIN PLUG	220~240V	1000	730	1450	178	1.06
STGRF12-SD STGRF12	1200	650	925	1215x620	2+BASE	1090 X 395	134A	121	1.32	0.46	5.0AMP	10 AMP 3 PIN PLUG	220~240V	1300	730	1450	212	1.38
STGRF15-SD STGRF15	1500	650	925	1515x620	2+BASE	1390 x 395	134a	154	1.67	0.58	5.2AMP	10 AMP 3 PIN PLUG	220~240V	1600	730	1450	243	1.69

Maximum shelf load weight 15kg spread evenly


**SLIDING FRONT DOORS** and rear glass sliding doors STGRF-SD  
**SOLID FRONT** and rear glass sliding doors STGRF

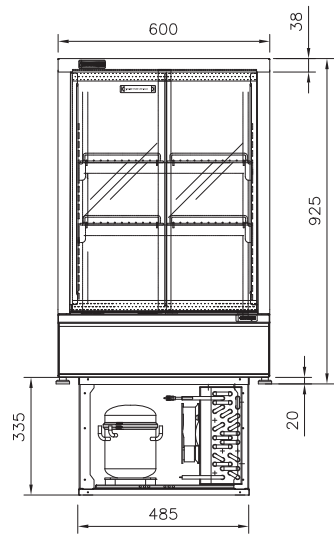


STG RF6

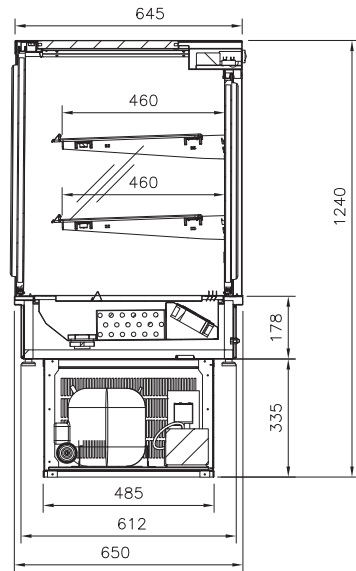


STG RF6

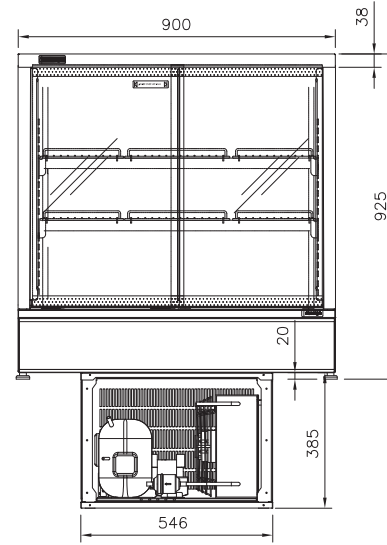


STG RF9

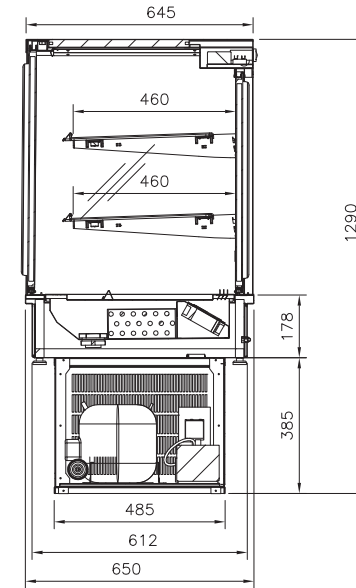


STG RF9  
STG RF12  
STG RF15

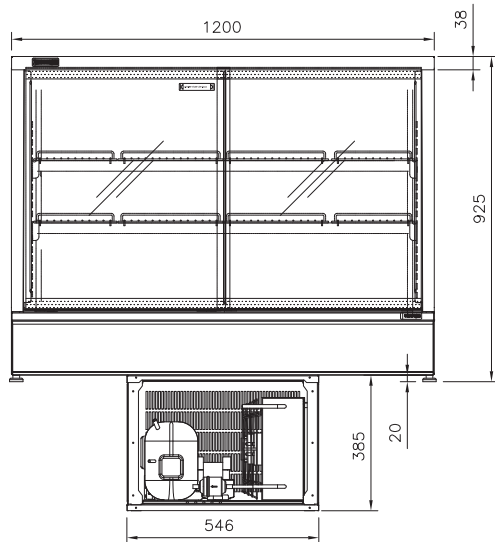

STG RF12

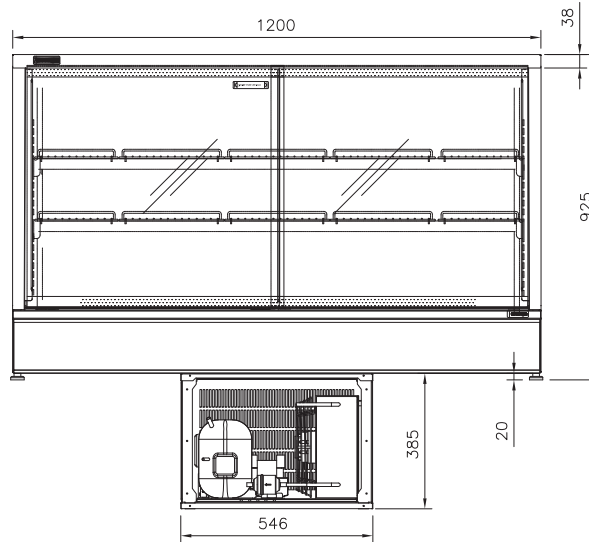

STG RF15

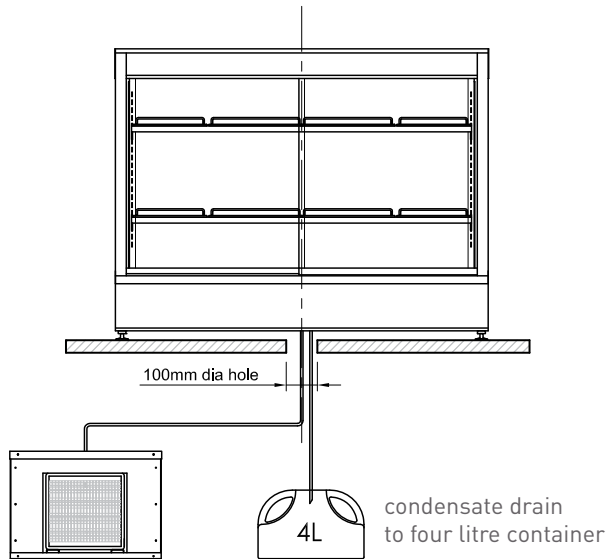


3/8" pipe max run 1500 mm

Vertical pipe runs are not recommended

Pipe runs over 150mm :  
Expansion valve will need to be fitted  
Correctly sized condensing unit fitted  
Correct pipe size determined

## REMOTE COMPRESSOR INSTALLATION

## DRAINAGE RECOMMENDATIONS for high humidity locations

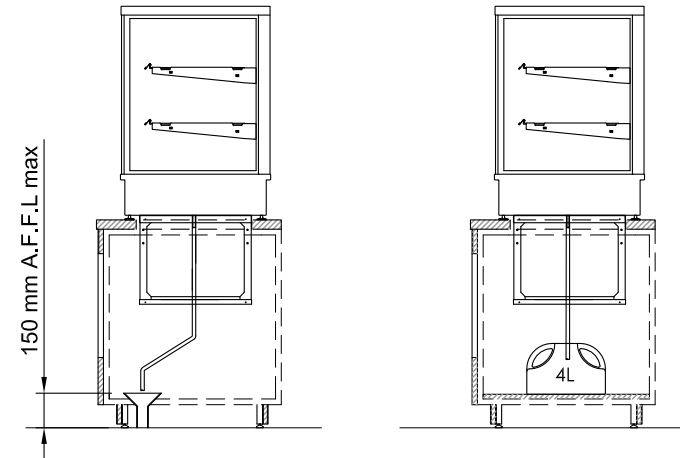

Plumbed

Receptacle

As standard units are self evaporating to a receptacle in the condenser unit. In areas of high humidity it is recommended by-passing the evaporator dish. A plastic hose can be attached to the end of the condensate drain and re-directed as shown.


### PLUMBED TUNDISH DRAINAGE

- Maximum 150 mm above finished floor level
- Drainage to building waste
- Building waste by client

### FREE STANDING RECIPIENT

- Receptacle placed under unit to receive condensate waste
- Dispose of waste water daily

TO BE CONSIDERED FOR  
HIGH HUMIDITY SITES  
WITH ACCESS TO DRAINAGE

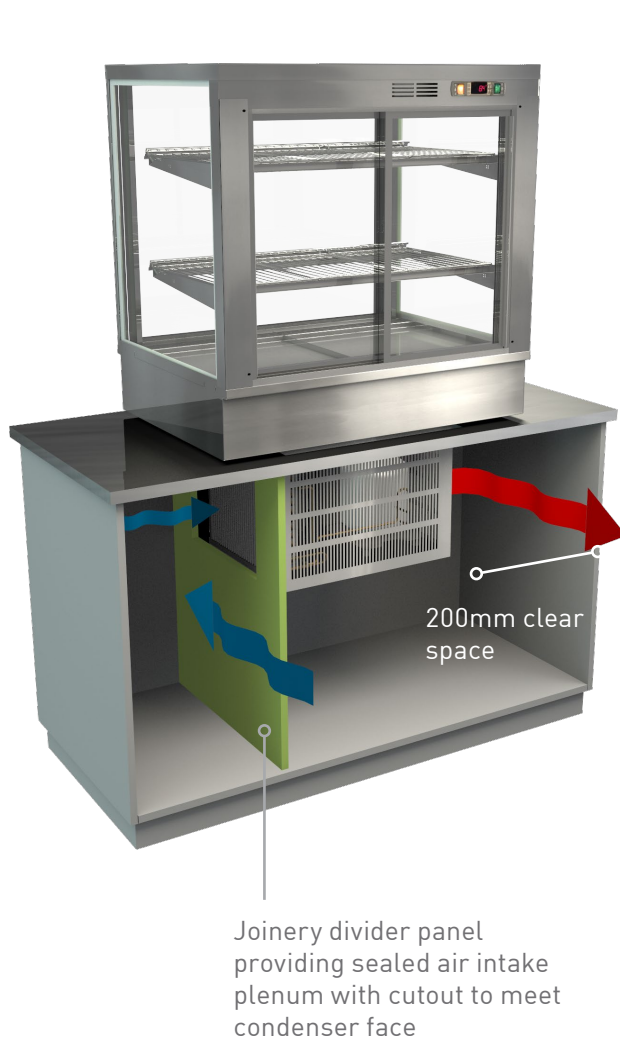




Ideal configuration cabinet open at rear




Cabinet with vented rear doors

## EXTRACTION FAN


- Extract hot air from box joinery
- Fan and power cable supplied, screw fixed to joinery
- Electrical power cord 2000mm 3 pin 10 amp 1 phase socket required
- Fan 230v ~ 50Hz - 60Hz - 19 Watt in stainless steel case

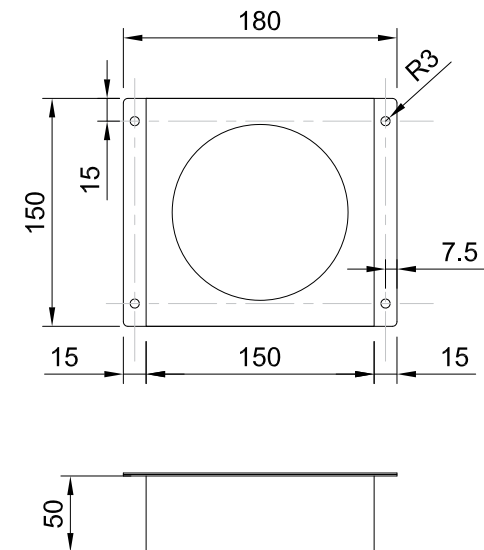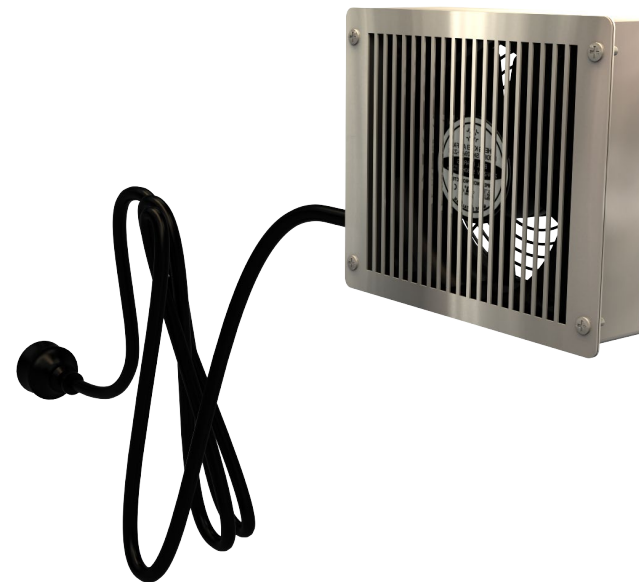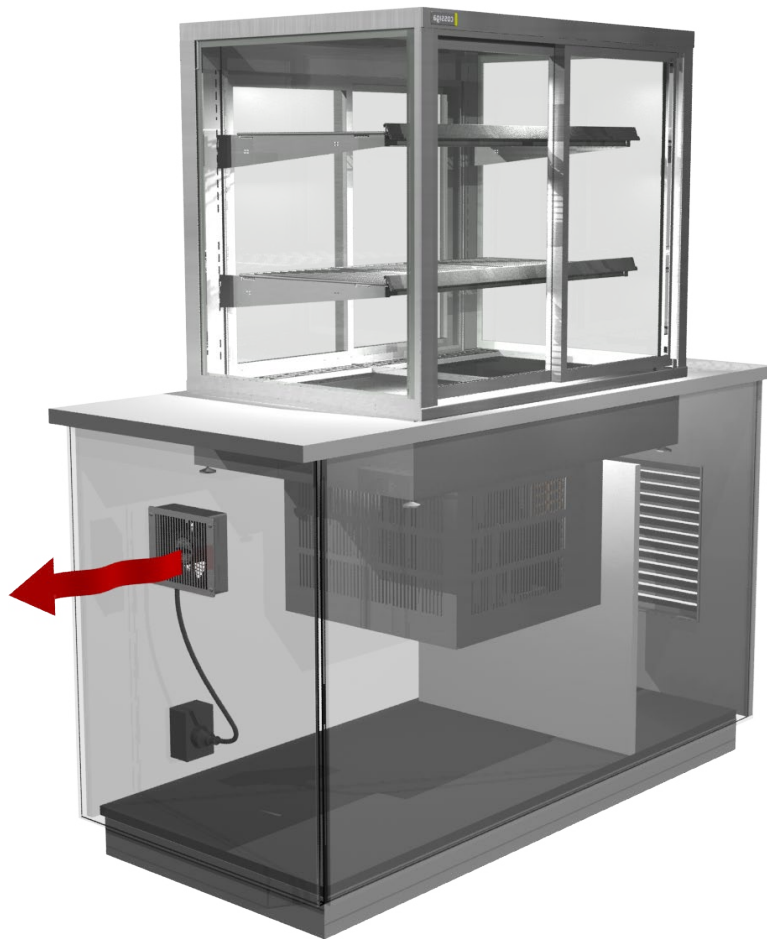

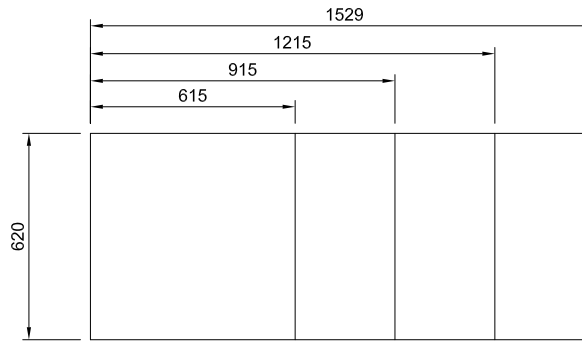


benchtop cut out sizes

Remove feet for all drop-in installations  
Supplied 5mm PVC wedge strip to sides for drop-in unit.

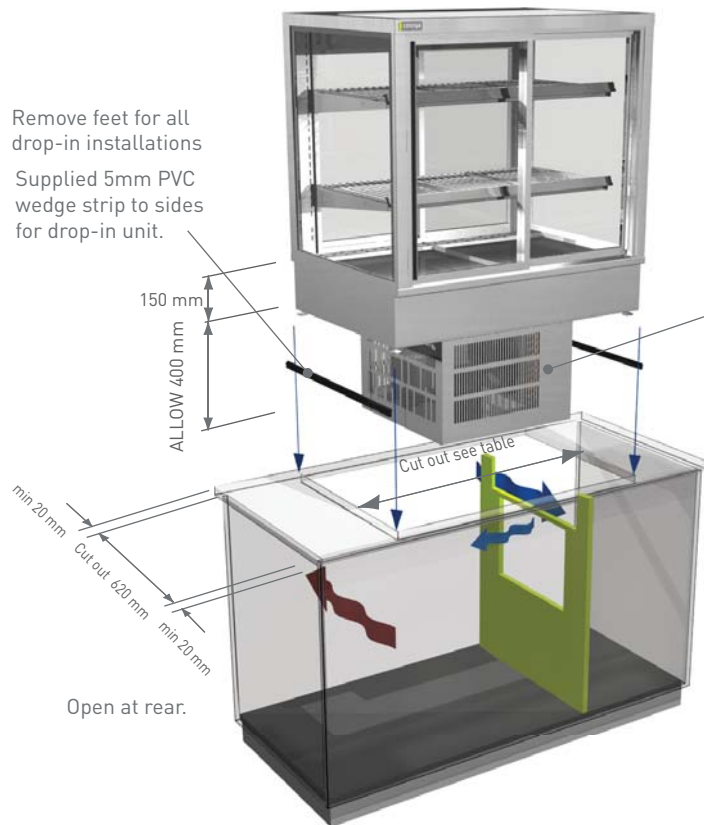


Full bench top drop in


Condenser unit  
545w x 485d x 390h  
(RF6 485w x 485d x 335h)

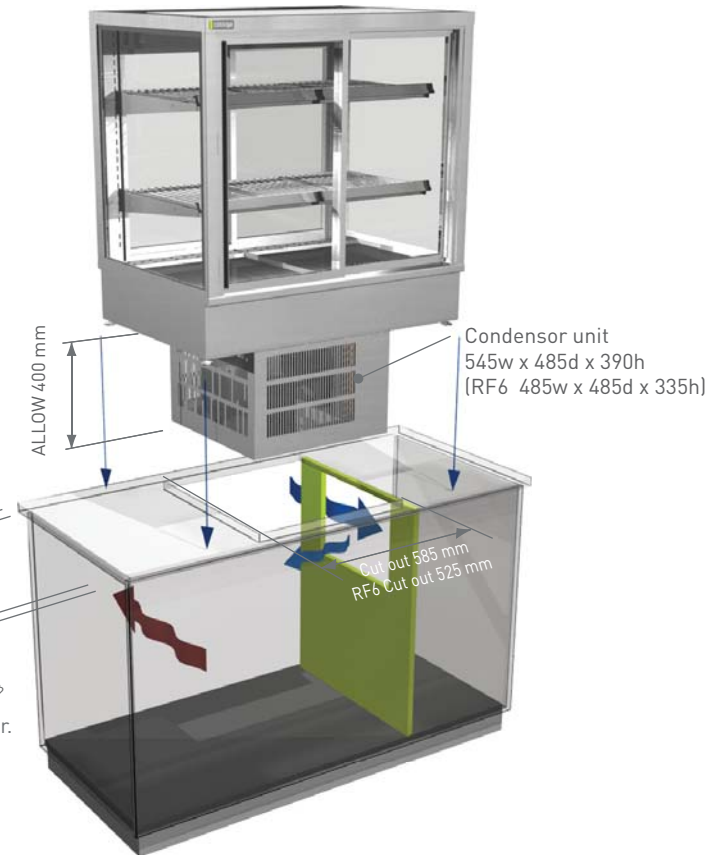

On bench top drop in



Supplied 5mm PVC wedge strip to sides for drop-in unit.  
No glue or sealant required

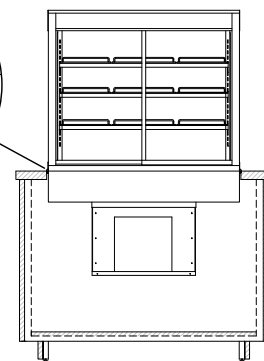


# IN BENCH INSTALLATION

COSSiga

THESE UNITS ARE HEAVY AND REQUIRE LIFTING INTO BENCH TOPS

PROTECT  
BENCHTOP ▶

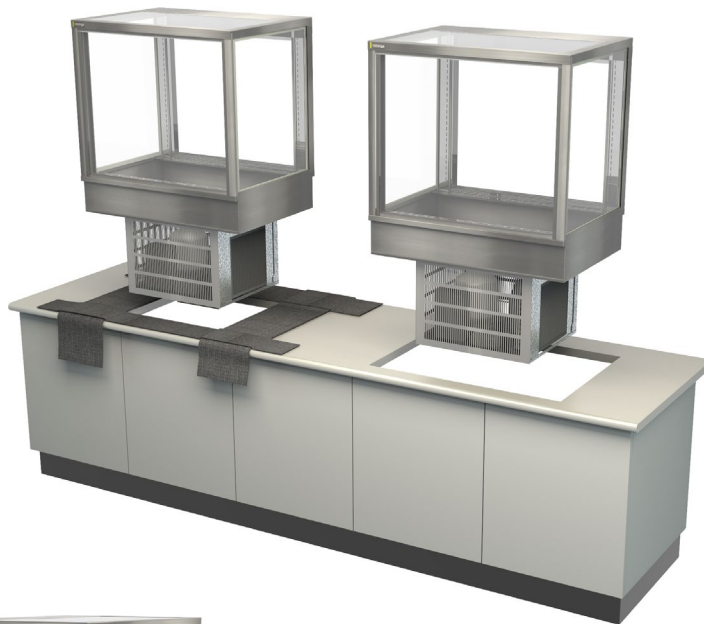

◀ REMOVE

- To reduce weight remove
- All doors
- Shelving
- Base plates


▶ PLAN AHEAD



- Have plenty of labour on hand
- Use a mechanical lifting device - optional
- Check bench top hole measurement
- Ensure enough clear depth in cabinet work
- Protect bench top with a mat or similar
- Pre-adjust unit feet if needed

All accepted local safety work wear and standards should be adhered to with a safety programme developed before undertaking of this kind of lifting work



◀ LIFT TO BENCH  
AND REST

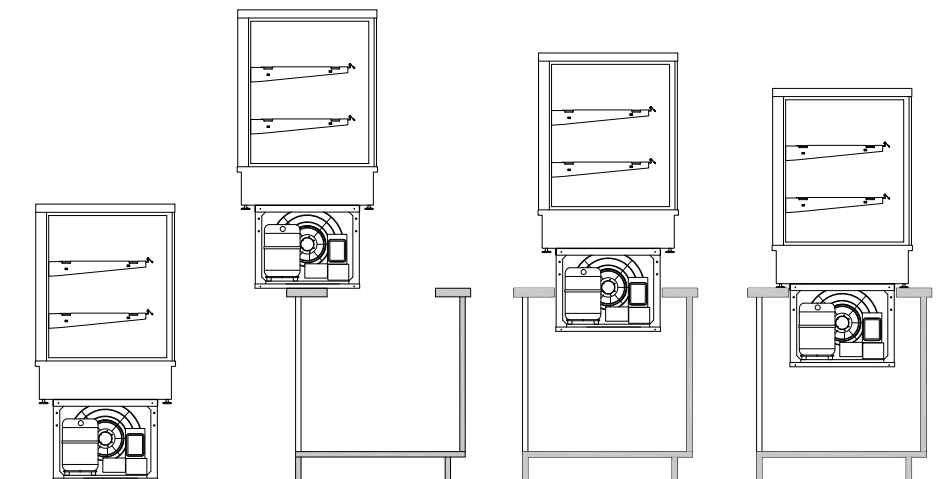

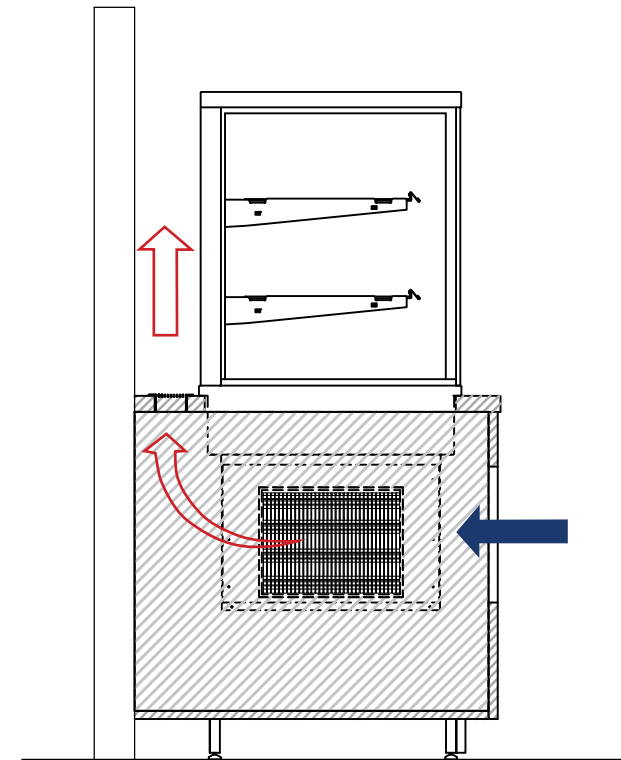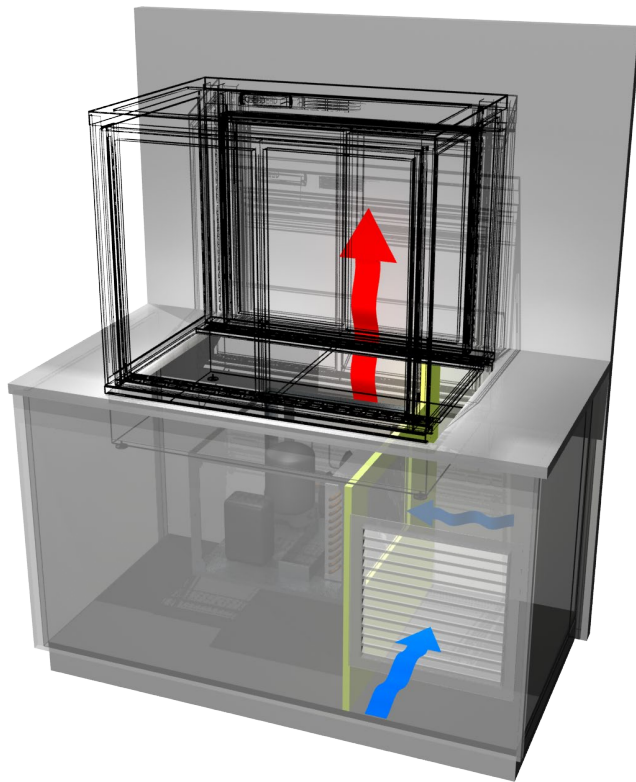

Horizontal vent in cabinet top for hot air extract

Electric biscuit fans can also be fitted to provide mechanical extract

Ambient air ducted in to compressor face through air plenum space

Joinery divider panel providing sealed air intake plenum with cut out to meet condensor face


Allow access for cleaning, servicing and waste evaporator water removal

Ambient air is drawn into front vented area


Hot air must escape joinery cabinet

A horizontal vent should be used behind the unit

Vent must be at least 100mm deep and as wide as unit



CLEAR FLOW



NO AIR FLOW  
AIR FLOW BLOCKED  
Too much chilled air around coil can create excessive ice build up


## CORRECT AIRFLOW

## IN CORRECT AIRFLOW

- Blocked air flow will retard operation on both HOT and COLD units
- Ensure trays or plates are not blocking air flow at rear

## Locations to avoid

- Close to shop front exterior
- In an outside location
- In direct sunlight
- In a high wind
- Near any source producing excessive heat
- Service units more frequently in dusty or polluted areas

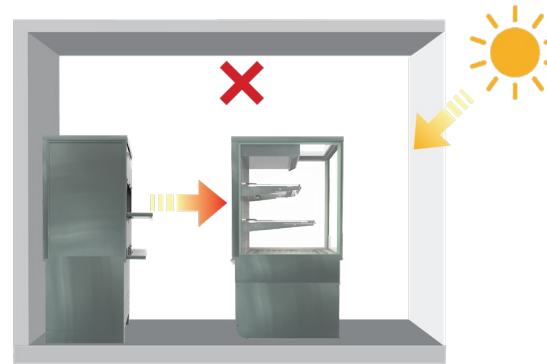


## Environmental conditions

Heat from other equipment and natural conditions, such as direct sunlight straight on units, can cause cooling to fail and overload compressor


## Top Mounted Controller Panel

For against wall installations  
Sold individually

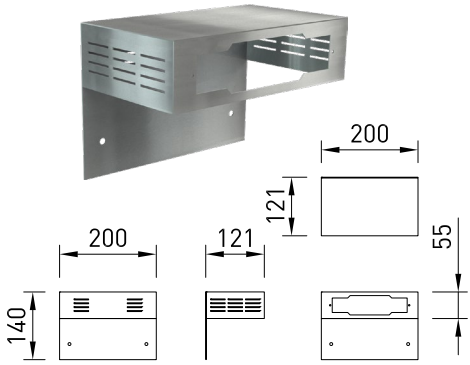


## Price Tabs

Stainless Steel  
Write on with marker or adhesive tape  
Measure 60mm x 30mm  
Sold in packs of 20



## Ventilation Grill

Stainless Steel  
Sold individually




## Base Tray - Heated Units

Stainless Steel  
For heated units  
Sold in pairs




## Tong Holder

Stainless Steel  
Drop into counter tray race  
Sold individually

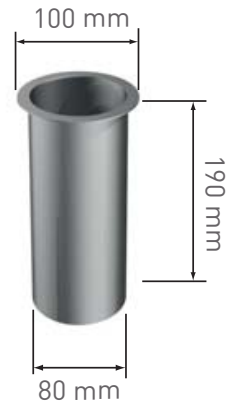


## Bag Holder

Stainless Steel  
Drop into counter tray race  
Sold individually




## Humidity Dish

Stainless Steel  
Perforated lid is removable






Shelf with ticket strip attached

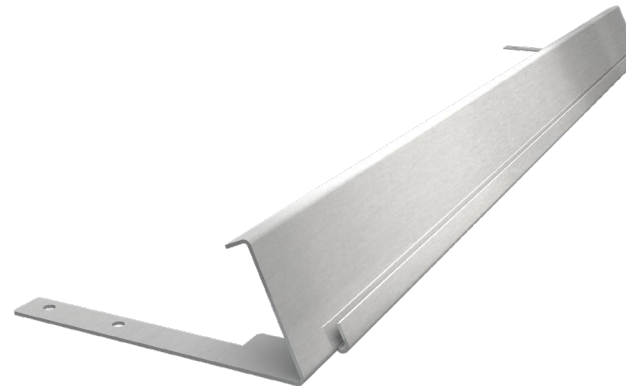

**Ticket Strip**  
Stainless Steel  
Attaches to shelf frame



**End Profile**

## Lengths

CABINET LENGTH MM	TICKET STRIP LENGTH
600	475
900	775
1200	1075
1500	1375


## Price Tabs

Stainless Steel  
Write on with marker or adhesive tape  
Measure 60mm x 30mm  
Sold in packs of 20



## Glass Shelf Options

Standard wire racks are removed and replaced with 6mm toughened glass panes

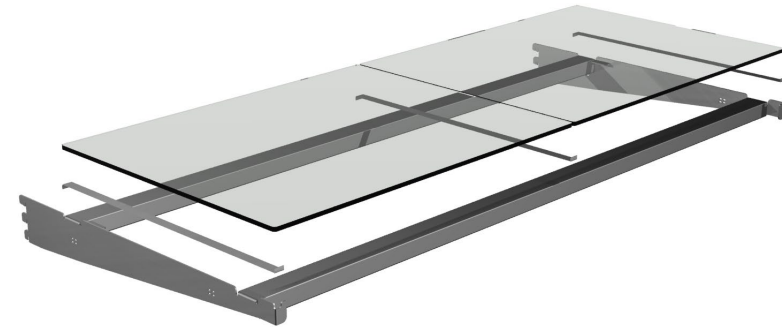


Maximum shelf load weight 15kg spread evenly

MODEL	GLASS	WIDTH MM	DEPTH MM	PER SHELF PANES	SHELVES	TOTAL PANES
STGRF6	6MM TOUGHENED - POLISHED EDGES	240	385	2	2	4
STGRF9	6MM TOUGHENED - POLISHED EDGES	390	385	2	2	4
STGRF12	6MM TOUGHENED - POLISHED EDGES	540	385	2	2	4
STGRF15	6MM TOUGHENED - POLISHED EDGES	690	385	2	2	4
STGHT6	6MM TOUGHENED - POLISHED EDGES	240	385	2	3	6
STGHT9	6MM TOUGHENED - POLISHED EDGES	390	385	2	3	6
STGHT12	6MM TOUGHENED - POLISHED EDGES	540	385	2	3	6
STGAB6	6MM TOUGHENED - POLISHED EDGES	240	385	2	3	6
STGAB9	6MM TOUGHENED - POLISHED EDGES	390	385	2	3	6
STGAB12	6MM TOUGHENED - POLISHED EDGES	540	385	2	3	6



Support bracket

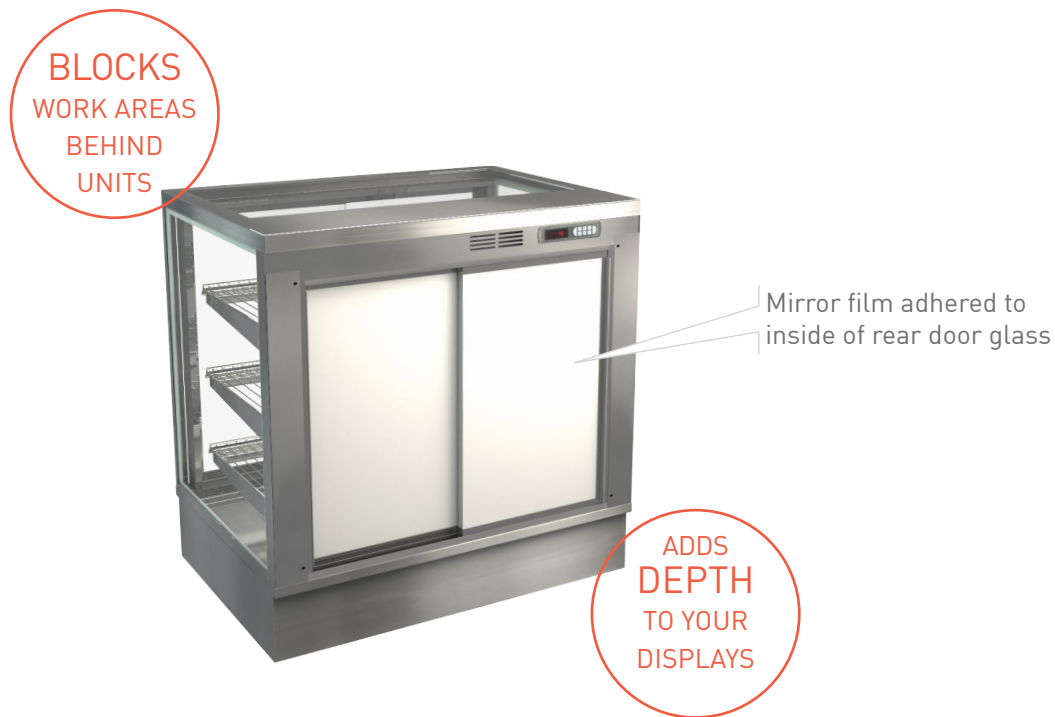


## MIRROR FILM


- Applied to the inside glass rear doors
- Suitable for heated and chilled units

## PIE TRAYS

- Stainless Steel Construction
- Placed on shelves for heated food items

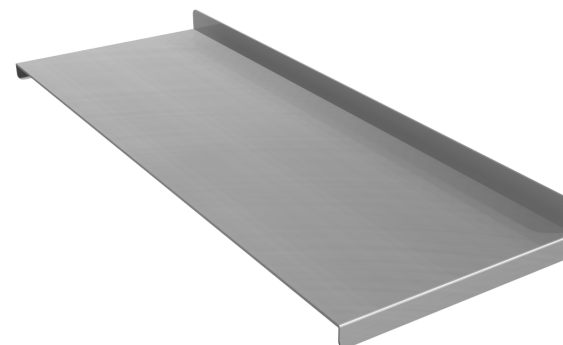


MODEL	CODE	QUANTITY	PIE TRAYS			TOTAL	TRAY WIDTH
			1ST SHELF DEPTH	2ND SHELF DEPTH	3RD SHELF DEPTH		
STGHT6	AA16015	4 Per Shelf	400MM	365MM	400MM	12 Trays	120MM
STGHT9	AA16016	6 Per Shelf	400MM	400MM	400MM	18 Trays	130MM
STGHT12	AA16017	9 Per Shelf	400MM	400MM	400MM	27 Trays	120MM

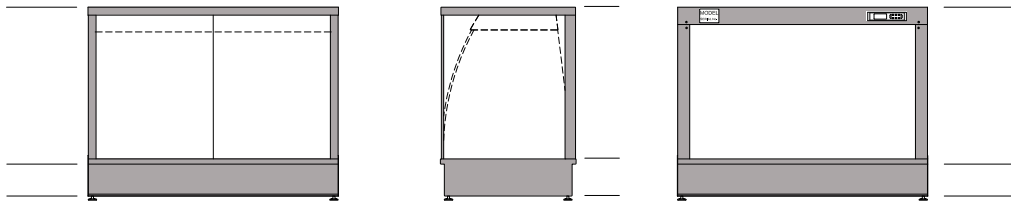


## COUNTER TOP MODEL - CURVED OR SQUARE

all exterior visible areas covered

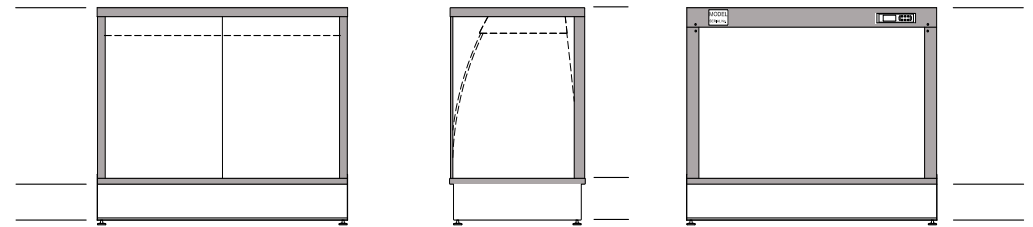

all exterior top visible areas covered

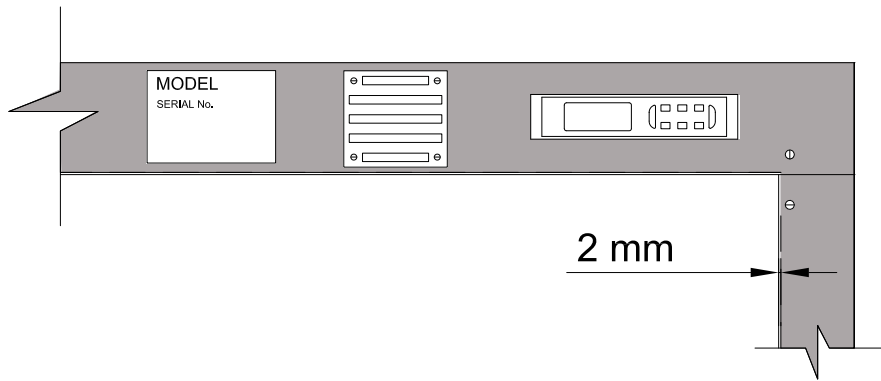

2mm gap left around rear frame

Rear of units cut around serial number plate, exhaust fan and controller

