

HOST

Insect Killer

Instruction manual

Model:

HOST0711FS



**Read this instruction
manual carefully
before use**

Safety Instructions

- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components or service panels on this product.
- Consult Local and National Standards to comply with the following:
 - Health and Safety at Work Legislation
 - BS EN Codes of Practice
 - Fire Precautions
 - IEE Wiring Regulations
 - Building Regulations
- Always switch off and disconnect the power supply to the appliance before cleaning.
- Install the appliance out of the reach of children.
- Never insert hands or other objects into the appliance while it is connected to the power supply.
- Install the Insect killer at least 1 metre away from food preparation areas.
- Never use near flammable objects.
- For INDOOR use only.
- Keep all packaging away from children.
- If the power cord is damaged, it must be replaced by a recommended qualified technician in order to avoid a hazard.
- HOST recommend that this appliance should be periodically tested (at least annually) by a Competent Person. Testing should include, but not be limited to: Visual Inspection, Polarity Test, Earth Continuity, Insulation Continuity and Functional Testing.
- **Danger - High voltage!** 
- The appliance emits UV radiation. Do not stare at the light.

- The appliance is not to be used in locations where flammable vapour or explosive dust is likely to exist.
- Do not use in barns, stables and similar locations.
- HOST recommend that this product is connected to a circuit protected by an appropriate RCD (Residual Current Device).

Installation

Note: Ensure the mounting substrate and the fixings used can support the weight of the appliance. If in doubt seek professional advice or assistance.

1. Remove all packaging and protective film from the Insect killer.
2. For best results, locate the Insect killer in the darkest part of the room, but at least 1 metre away from food preparation areas.

Note: Close proximity to other light sources such as sky lights and windows will reduce the effectiveness of the Insect killer.

3. Connect the appliance to mains power.

Operation

WARNING: Under no circumstances should hands be placed anywhere near the high voltage grid when the appliance is operational.

The insect killer works by luring insects on to an electrified metal grid using ultra-violet light. It uses no chemicals and is pollution free. To use the Insect killer:

1. Press the switch to the ON (I) position. Ensure it is set to OFF (O) before plugging into mains.
2. The light will come on and the grid will become electrically charged.

Cleaning, Care & Maintenance

Always switch off the power and disconnect the appliance from the power supply before cleaning.

- Clean the collection tray regularly with warm soapy water.
- DO NOT immerse the appliance in water. Wipe the safety guard and external casing with a damp cloth.
- Change the bulbs every 12 months.


Changing the Bulb

WARNING: Always turn Off the appliance and disconnect from the power supply before changing the bulb.

1. Remove the collection tray.
2. Lay the appliance face down.
3. Unscrew the two screws holding the safety guard at the rear of the Insect killer [Fig. 1].




4. Lift up the guard rail [Fig. 2].

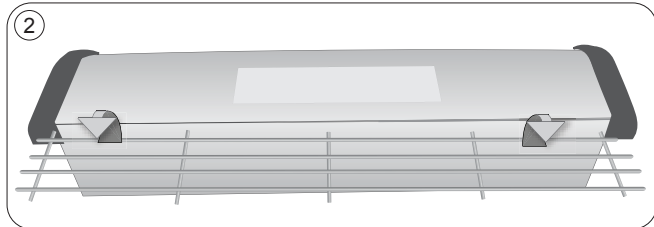

5. Holding the ends of the bulb, twist it 'forwards' in its socket until it clicks [Fig. 3].



6. Slide the bulb up out of its sockets [Fig. 4].
7. Replace with a new bulb.
8. Twist the new bulb 'backwards' to lock it back in place.
9. Replace the guard rail and the two screws.

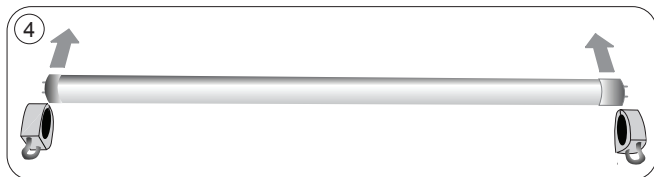

Troubleshooting

A qualified technician must carry out repairs if required.

Fault	Probable Cause	Solution
The appliance is not working	The unit is not switched on	Check the unit is plugged in correctly and switched on
	Plug or lead is damaged	Replace plug or lead
	Fuse in the plug has blown	Replace the fuse
	Mains power supply fault	Check mains power supply
	Tube has expired	Refer to the 'Changing the Bulb' section
	Tube is faulty or has not been fitted correctly	

Service

Should your appliance have a fault, please visit the Service section of the HOST website.

Technical Specifications

Model	Voltage	Power	Dimensions (H x W x D) (mm)	Weight (kg)
HOST0711FS	220-240V~ 50-60Hz	15W	272 x 350 x 86	2.05

Due to our continuing program of research and development, the specifications herein are subject to change without notice.

Electrical Wiring

The appliance is supplied with a 3 pin BS1363 plug and lead.

The plug is to be connected to a suitable mains socket.

The appliance is wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

This appliance must be earthed.



If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

Compliance

The WEEE logo on this product or its documentation indicates that the product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.



HOST parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.



All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of HOST.
Every effort is made to ensure all details are correct at the time of going to press, however, HOST reserve the right to change specifications without notice.

HOST UKCA Declaration of Conformity



We {Host} of {Host House, Chepstow, NP16 6UP} hereby declare that the equipment is in conformity with the requirements of the following Regulations:

- Electrical Equipment (Safety) Regulations 2016
- Electromagnetic Compatibility Regulations 2016
- The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

We hereby declare that:

Equipment Model number HOST0711FS LED Fly Killer Small

is in conformity with the applicable requirements of the following documents

Ref. No.	Edition/date
BS EN 60335-1	2012 +A11:2014 +A13:2017 +A1:2019 +A14:2019 +A2:2019
BS EN 60335-2-59	2003+A1:2006+A2:2009+A11:2018
BS EN 55014-1	2017
BS EN 55014-2	2015
BS EN 61000-3-2	2014
BS EN 61000-3-3	2013

I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications and is in accordance with the requirements of the Regulations:

Signed by: 

Full Name Jess Attice

Title: General Manager

Location: Chepstow, Great Britain

Date: 15th June 2022



www.host-appliances.com

HOST0711FS_EN_A5_v1_2022/08/12