

## SPH505HAU

ECOLINE PASSTHROUGH DISHWASHER WITH **SHR+ - STEAM HEAT RECOVERY**

THREE PHASE (6.7 KW SINGLE PHASE OPTIONAL) - 500x500 mm basket



### GUARANTEED WASH PERFORMANCE

In commercial dishwashers, the rinse is the most important part of the wash cycle, as it is the only one performed with clean water. This is the reason why, at Smeg, we believe all commercial dishwashers must have **a rinse pump on board**, the only way to guarantee that optimal and constant pressure and temperature are maintained throughout the rinse cycle.

### WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in our state of the art factory in Italy, where we monitor all phases of design, engineering and production.

### PRODUCT FEATURES

- Construction in AISI 304 stainless steel
- **HTR (High Temperature Rinse) system with atmospheric boiler and rinse pump**
- 3.2 litres water rinse cycle
- Approximately 15% water exchange every cycle
- Drain pump with triple stage dynamic filtration system
- Door opening height: 470mm
- Electronic controls with 3 wash programs
- Shortest wash program 90 seconds
- Soft start wash pump
- Selfcleaning cycle
- Thermostop system to ensure correct rinse temperature
- Adjustable peristaltic pumps for detergent and rinse-aid injection
- Self-diagnostic system with error messages
- **Power connection: three phase (standard) or single phase (optional)**
- **24 months parts and labour warranty**

### SUPPLIED ACCESSORIES

- PB50D01 - 500x500mm basket. 18-plate Ø250mm
- PB50G01 - 500x500mm flat-bottomed basket

### OPTIONAL ACCESSORIES

- WB50D01 - Wire basket. 18-plate Ø250mm
- WB50G01 - Wide-mesh wire basket with flat bottom
- WB50G02 - Wire basket with inclined bottom for stem glasses max Ø90mm
- WB50G03 - Wire basket with inclined bottom for stem glasses max Ø72mm
- WB50G04 - Wire basket with inclined bottom for stem glasses max Ø120mm
- WB50T02 - Wire basket for 7 GN1/1 20mm deep baking rins
- WB50T03 - Wire basket for GN1/1 60mm deep


# SPH505HAU

ECOLINE PASSTHROUGH DISHWASHER WITH **SHR+ - STEAM HEAT RECOVERY**

THREE PHASE (6.7 KW SINGLE PHASE OPTIONAL) - 500x500 mm basket

## TECHNICAL SPECIFICATIONS

<b>Dimensions (mm) (WxDxH)</b>	635x750x1510/2102	<b>Minimum supply pressure (bar)</b>	1 Bar - 100kpa
Basket (mm)	500x500	<b>Drain pump</b>	Yes
Door clearance (mm)	470	<b>Rinse aid pump</b>	Peristaltic
Type of interface	Electronic - 8 Digit	<b>Detergent pump</b>	Peristaltic
Supplied water temperature (°C)	cold water (5 to 20°)	<b>Programme 1 (sec)</b>	90*
Tank volume (litres)	14	<b>Programme 2 (sec)</b>	150*
Tank heating element (W)	2,200	<b>Programme 3 (sec)</b>	240*
Filtering system	Tank filter + selective filter	<b>Special programmes</b>	Drain Self-cleaning
Boiler volume (litres)	8	<b>Thermostop</b>	Yes
Boiler heating element (W)	9,000	<b>Total power (W)</b>	3,700 - 9,700
Wash pump (W)	700	<b>Electrical connection</b>	<b>Standard</b> 400V 3N~/16A/9,7kW/50Hz
Tank temperature (°C)	60°		<b>Optional</b> 230V~/30A/6,7kW/50Hz 230V 3N~/26A/9,7kW/50Hz
Rinse pump	Yes	<b>Basket number</b>	
Rinse temperature (°C)	85°	dishes	1 x PB50D01
Adjustable temperatures	Yes	universal / glasses	1 x PB50G02
Water consumption (litres/cycle)	3.2	cutlery	1 x PHOOS02
Net weight	122kg		

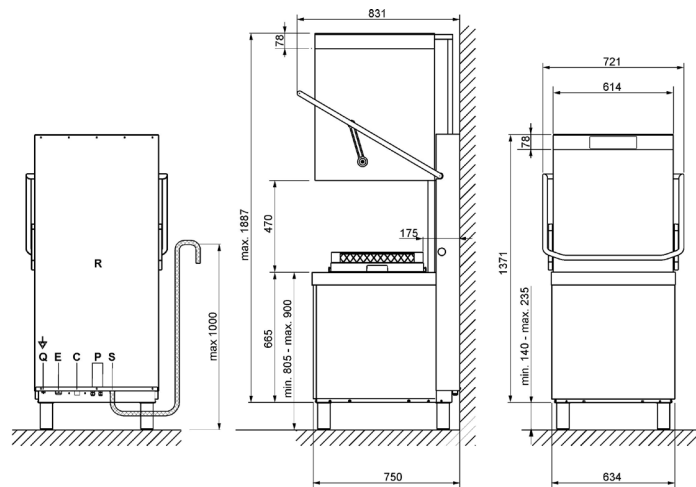

### CONNECTION WIRING DIAGRAM KEY

R	Rear lower panel
C	Water supply tubing
S	Water drain tubing
Q	Equipotential terminal

P	Peristaltic doser tubes
E	Electrical power cable
F	External doser power supply cable input

\* Indicative wash times  
\*Cold water connection required and three-phase electrical connection whenever possible



UNI EN ISO 9001 9130-Smeg  
UNI EN ISO 14001 9191-SME2  
OHSAS 18001 9192-SME3