



**FRIFRI SUPER EASY 422 ELECTRIC FREE-STANDING TWIN TANK
FRYER WITHOUT FILTRATION - 2 BASKETS - W 400 MM - 2 X 7.5
KW - THREE PHASE**

MODEL: SL422L32N0



Super+easy

When budget is a primary consideration, FriFri's unrivalled credentials, know-how and quality are still well within your reach. A free standing Super Easy 422 offers outstanding value with no compromise in quality or performance.

A/A FILE NUMBER:

ITEM NUMBER:

PRODUCT FEATURES

- Outstanding quality with no compromise in quality or performance.
- Mechanical thermostat maintains oil to within $\pm 8^{\circ}\text{C}$ of the temperature selected.
- Low watts density element with a large surface area in contact with the oil for fast recovery time and to prevent scorching which degrades oil.
- Keeping your oil in peak condition! Integral gravity filtration extends oil life by up to 75% saving you money on oil purchase and disposal costs. Optional xFri© filters the oil at the push of a button and returns oil to the tank. Filter the oil safely, even while it's still hot, mid service if necessary, and resume frying in minutes – so easy there is no excuse not to!
- Pressed tank for strength and durability. Radiused corners for easy cleaning. Hinged elements with two tilt positions for draining and cleaning.
- Optimum Allergy Control. Supplied with separate oil buckets, and can be supplied with separate pumped filtration systems, providing completely segregated gravity filtration for optimum allergen control or to cater for dietary preferences.
- Single phase.



FRIFRI SUPER EASY 422 ELECTRIC FREE-STANDING TWIN TANK FRYER WITHOUT FILTRATION - 2 BASKETS - W 400 MM - 2 X 7.5

MODEL: SL422L32N0

WEIGHTS & DIMENSIONS

Width	397.5 mil
Depth	650 mil
Height	986 mil
Weight	56 kg

SHIPPING DETAILS

Ship Width	79 cm
Ship Depth	52 cm
Ship Height	113 cm
Ship Weight	60.17 kg
Number of Shipment Parcels	1
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Electrical Phase	3-Phase
Electrical Amps Per Conductor	L1=2 x 10.9; L2=2 x 10.9; L3=2 x 10.9	Electrical Plug Type	Hardwired
Electrical Total Amperage	65.4 A	Number of Electrical Plugs	Not Applicable
Electrical Volts	400V	Electrical Connection Type	Direct Hardwired
Electrical Total Wattage	1500 W	Number of Electrical Conductor Wires	2
Electrical Kilowatts	15 kW	Electrical Remarks	Three

ADDITIONAL SPECIFICATIONS

Auto Oil Top-Off	No	Number of Vats (batteries)	2
Basket Lift Type	Not Applicable	Total Oil Capacity (volume)	18 l
Construction Remarks	Stainless Steel Grade 304	Oil Reclamation	No
Control Type	Rotary Control Knob	Oil Temperature Control	Mechanical
Food Production Rate	2 x 17kg fries - 7mm [frozen]	Pumped Oil Filtration	No
Fryer Type	Open Pot	Split Pot	Yes
Integrated Filtration	No	Temperature Maximum	190 °C
Number of Baskets	2	Temperature Minimum	90 °C
		Vat 1 Oil Capacity (volume)	9 l
		Vat 2 Oil Capacity (volume)	9 l

Frifri reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
October 30, 2024








**FRIFRI SUPER EASY 422 ELECTRIC FREE-STANDING TWIN TANK
FRYER WITHOUT FILTRATION - 2 BASKETS - W 400 MM - 2 X 7.5**

MODEL: SL422L32N0

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING

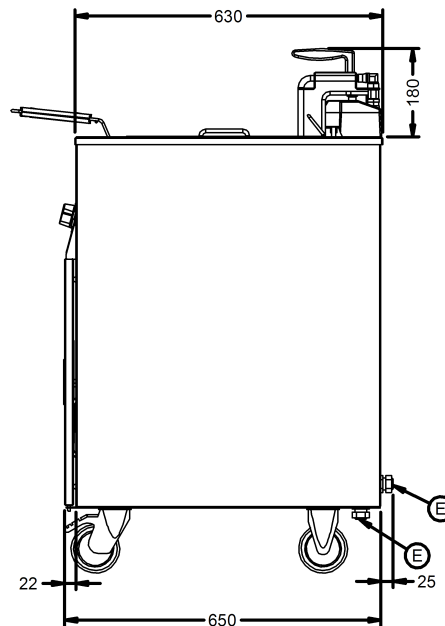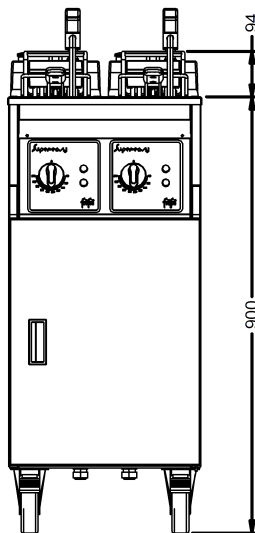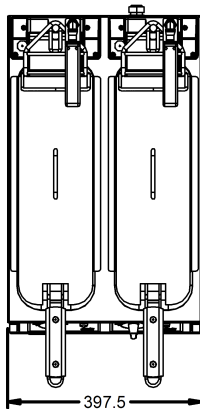

Frifri reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
October 30, 2024

