

SPH 255

Modular Ice Machine 215 kg



Item
Project
Quantity

	FEATURES • Electronic control board with self diagnostic and malfunction alarms. • Resistant stainless steel exterior. • Easy, front panel access to technical / service area of the machine. • Continuous production • Direct trasmission • R290 refrigerant		
	CONDENSING SYSTEM Water cooled Air cooled	RECOMMENDED BIN	
		BIN	KG
		R100	129
		R130	168
	REFRIGERANT GAS R290		
	VOLTAGE V/HZ/PH 230\50\1		
CERTIFICATIONS     	OPERATING REQUIREMENTS		
		Minimum	Maximum
	Air temperature	10	43
	Water temperature	5	38
	Water pressure	1 bar (14 psi)	5 bar (70 psi)
	Electrical voltage	-10%	+10%
	IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.		www.simag.it

Modular Ice Machine 215 kg


SPH 255

Modular Ice Machine 215 kg

SIMAG

Item
Project
Quantity

Modular Ice Machine 215 kg

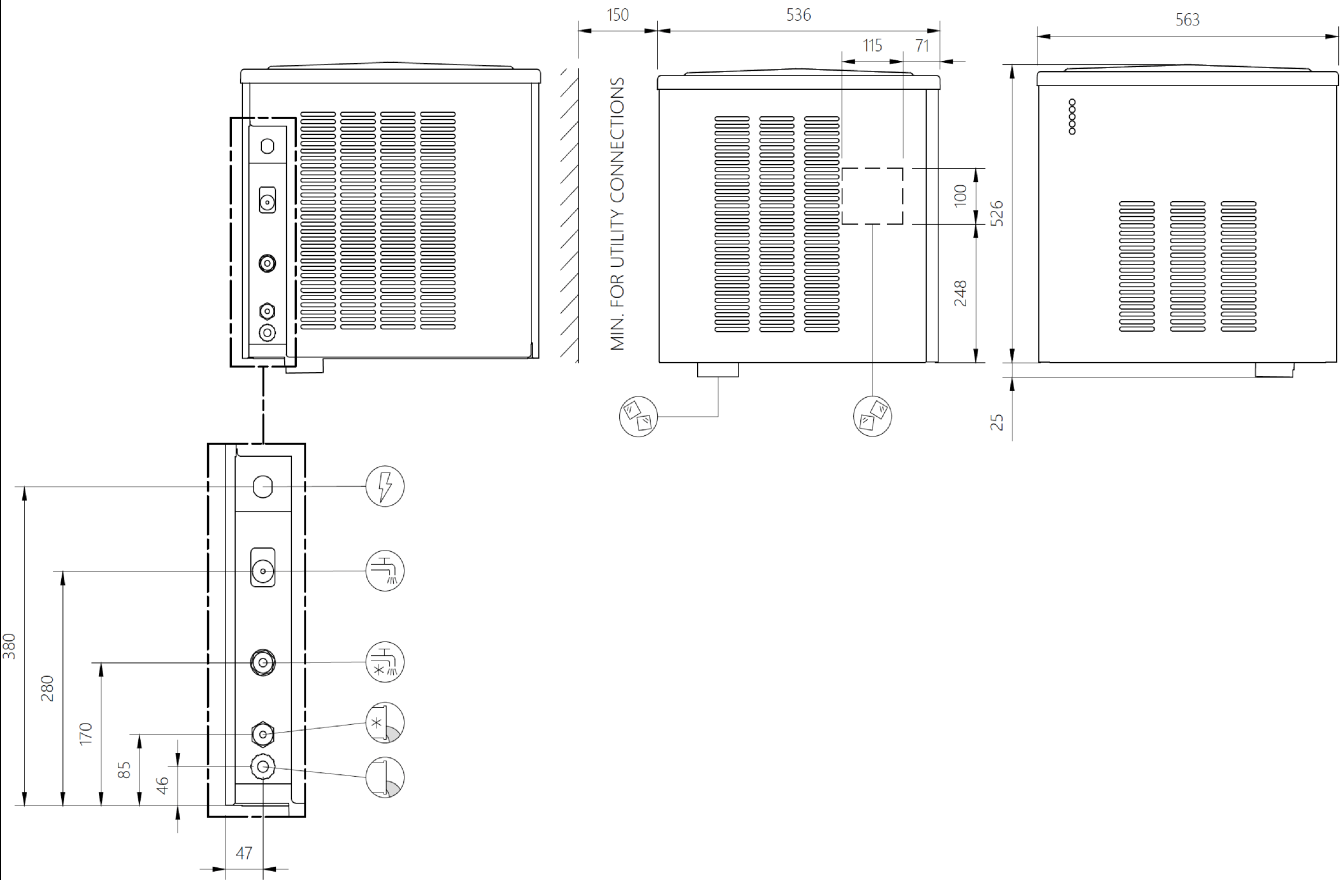

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)								
Net weight			Gross weight								
560 x 533 x 525 mm			680 x 610 x 630 mm								
52 kg			55kg								
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
SPH 255 WS	230\50\1	W	215	210	185	1,5	14	59	580	3 x 1,5	10
SPH 255 AS	230\50\1	A	200	199	170	1,5	15	7	695	3 x 1,5	10