

SPH 605

SIMAG

410 kg Modular Ice Machine

Complete Range: SPH 255 – SPH 405 – SPH 605

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air cooled
- Easily accessible components
- Low power and water consumption
- Direct transmission
- Reduced dimensions
- Continuous production
- Refrigerant R290



Matching bins

Machine	Bin	kg
SPH 605	CBT22EFCD R100	129
	CBT30EFSD R130	168
	CBT30EFSD R150	181
	CBT30EFSD R190	243
	CBT42EFSD R250	252
	CBT48FMCD R300	406
	CBT52FMCD R400	478
	● RC200	210
	● RC300	391

- ✓ : Direct coupling
● : Ice chute cut-out performed upon installation
CBTxxxxxxxx: accessory needed

Voltage

230/50/1 Standard version
220-240/60/1 Available on demand

Technology and Certifications



Type of ice

Flake Ice



Residual water content 25%

Machine dimensions

Net size WxDxH	538 x 663 x 790 mm
Net weight	94 kg
Shipping size WxDxH	610 x 760 x 960 mm
Shipping weight	103 kg

SIMAG
Via Lainate 31 - 20010 Pogliano Milanese - (Milano) Italy
Tel. +39.02.93960323
e-mail: sales@simag.it


www.simag.it

SPH 605



410 kg Modular Ice Machine

Complete Range: SPH 255 – SPH 405 – SPH 605

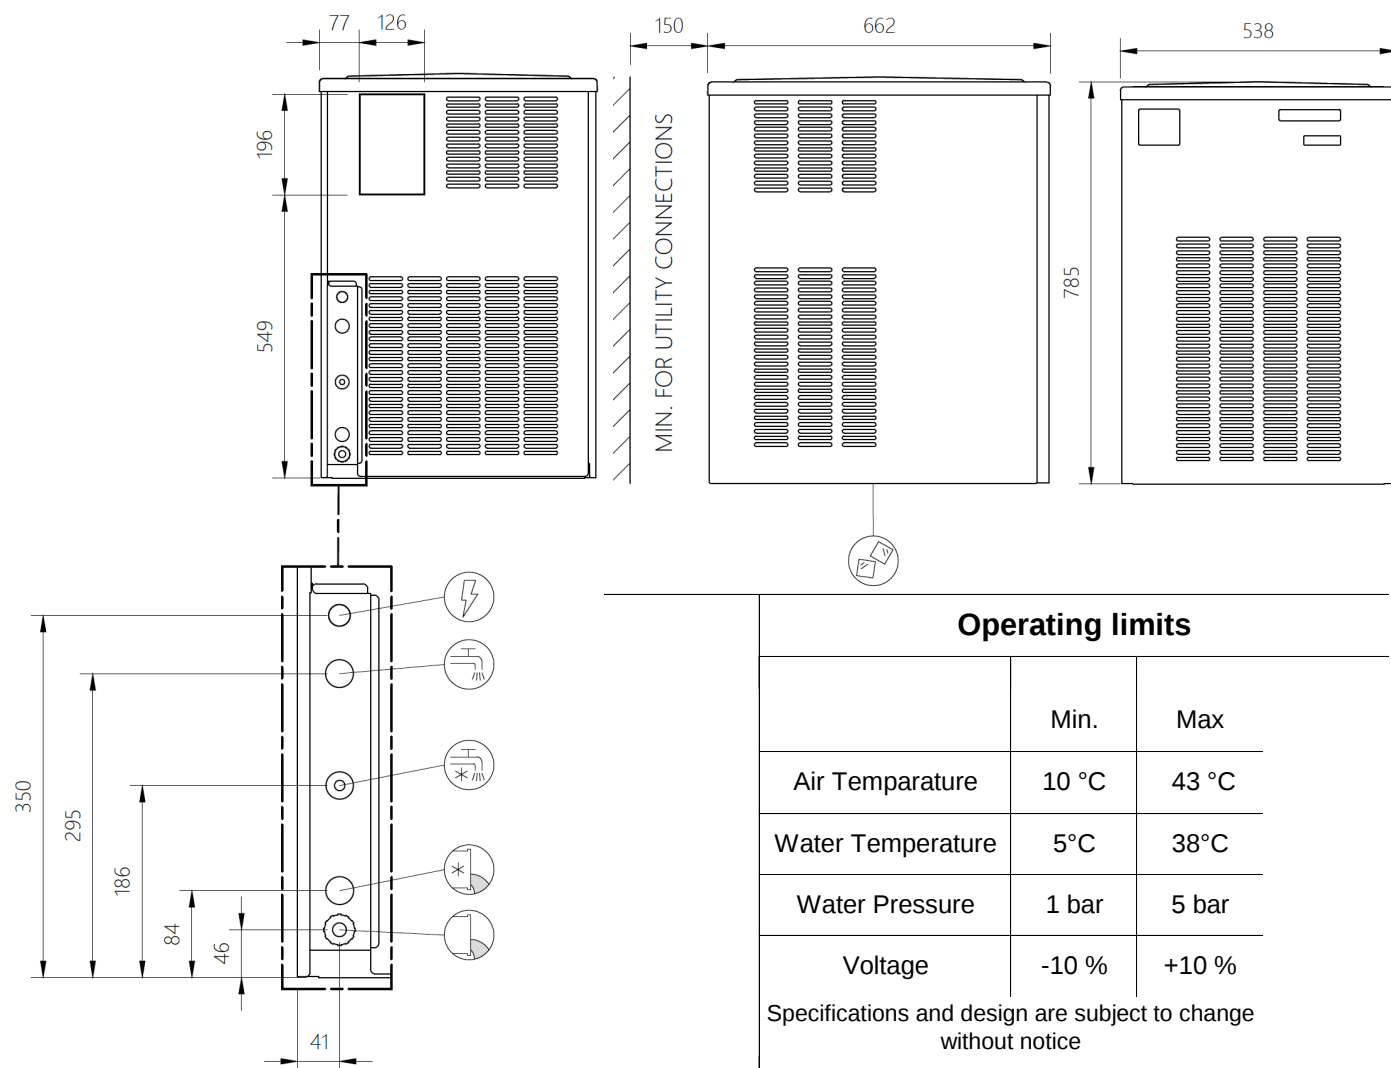

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
SPH 605 A	230/50/1	410	340	1390	R290	0,15	16	11,4	30,4	11,7

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water